





Reversible Motor

Reversible Motor

Index

Outline of Reversible Motor	B-67
Reversible Motor 6W (□60mm)	B-69
Reversible Motor 6W (□70mm)	B-71
Reversible Motor 10W (□70mm)	B-73
Reversible Motor 15W (□70mm)	B-75
Reversible Motor 15W (□80mm)	B-77
Reversible Motor 25W (□80mm)	B-80
Reversible Motor 40W (□90mm)	B-83
Reversible Motor 60W (□90mm)	B-86
Reversible Motor 90W (□90mm)	B-90
Reversible Motor 120W (□90mm)	B-94



B AC Motors

Outline of Reversible Motor

适合双向连续运行


- 可逆电机设计用于频繁切换方向的应用。它是电容启动型单相感应电机。因此，其基本特性（速度、扭矩和电压）与感应电机相同。为了在短时间内实现频繁的双向运行，采用了临时刹车机制。

额定时间：30分钟

- 可逆电机设计为在短时间内实现双向运行，因此无法避免输入功率的极高损耗。因此，其温度上升可能比感应电机更严重。结果，额定运行时间可能限制为30分钟。但请告知，根据运行条件，如果间歇运行，它们可以运行超过30分钟。


可逆电机的刹车机制

- 可逆电机采用简单且内置的刹车机制，具有以下目的：
 - 通过施加摩擦负载来改善频繁且即时的反转功能。
 - 减少过冲。
- 线圈弹簧施加恒定压力，使陶瓷（刹车块）滑向刹车盘。此机制提供一定的刹车力，但受机制结构限制。刹车力约为电机输出的10%。

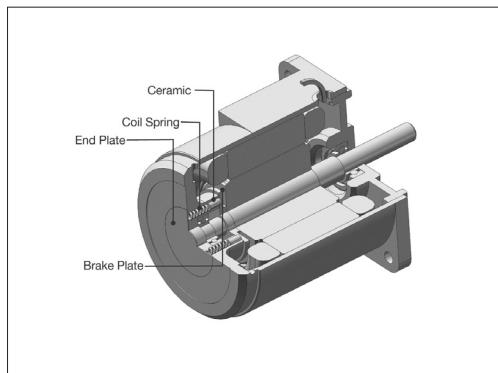

速度-扭矩特性

- 可逆电机是单相感应电机的电容启动型，具有与感应电机相同的特性。可逆电机具有更高的启动扭矩，以改善瞬时反转特性。

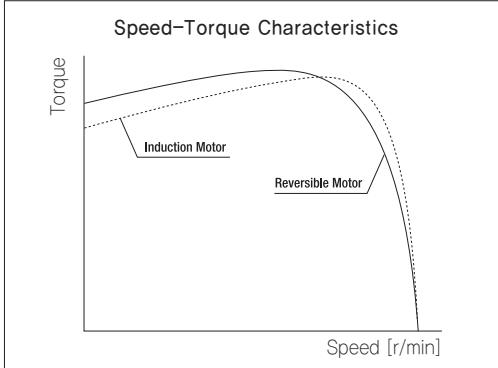


运行时间和温度上升

- 可逆电机的额定时间为30分钟。但当电机间歇运行时，运行时间会因操作条件而异。间歇运行会导致电流通流过大，从而产生更多热量。但通过保持电机在静止状态以增强自然冷却能力，可以在长时间内控制温度上升。如果电机壳温始终低于90°C，即使在不变条件下连续运行也是可能的，前提是绝缘等级符合线圈绕组的要求。但润滑脂的使用寿命将大大延长，温度越低越好。

运行周期和温度上升


	Run	Stop									(Figure 1) Operating Cycle
A			1 sec.	1 sec.	1 sec.						1 sec. run, 1 sec. stop
B											2 sec. run, 2 sec. stop
C											2 sec. run, 1 sec. stop
D											1 sec. CW run, 1 sec. CCW run, 1 sec. stop
E											2 sec. CW run, 1 sec. CCW run, 1 sec. stop
F											Continuous run

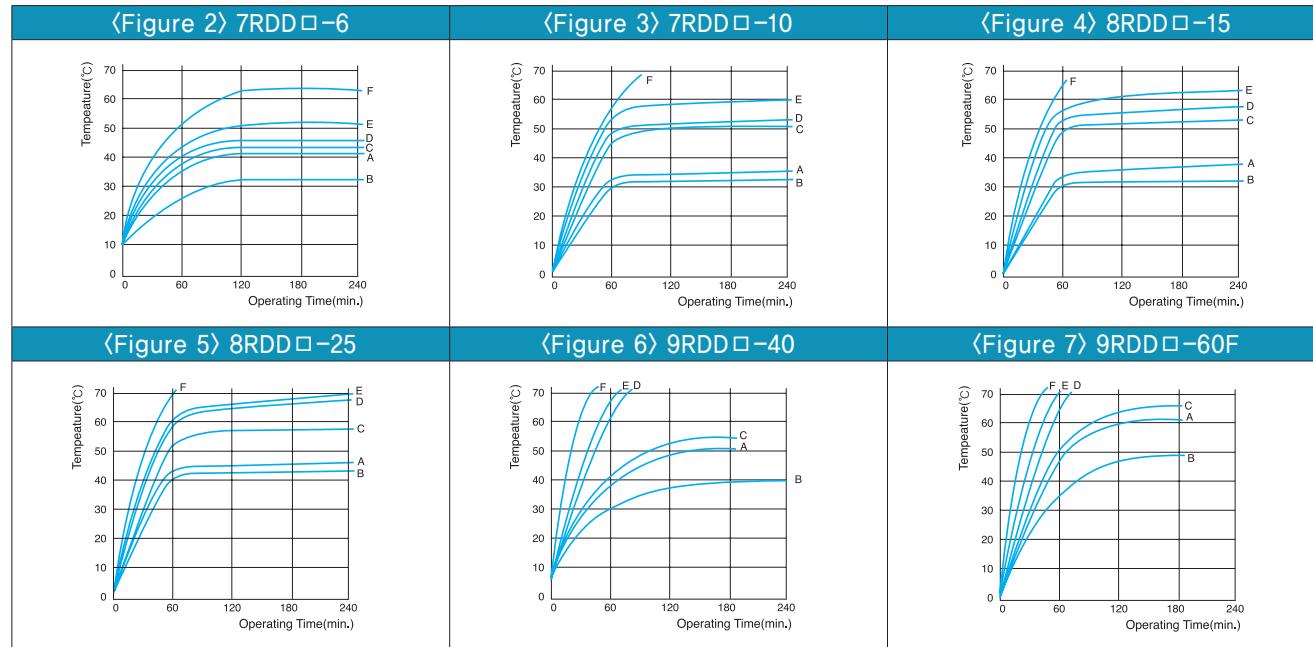

General Specifications

Item	Specification
Insulation Resistance	100MΩ or more when DC500V MEGA is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5kV at 50Hz and 60Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method after rated motor operation with connecting a gearhead or equivalent heat radiation plate.
Insulation Class	Class B [130°C]
Overheat Protection	Operating temperature (Built-in thermal protector type motor): Open 120°C±5°C, Close 90°C±5°C
Ambient Temperature	-10°C~+40°C (Three phase 220VAC: -10°C~+50°C)
Ambient Humidity	85% maximum

Connection Diagrams

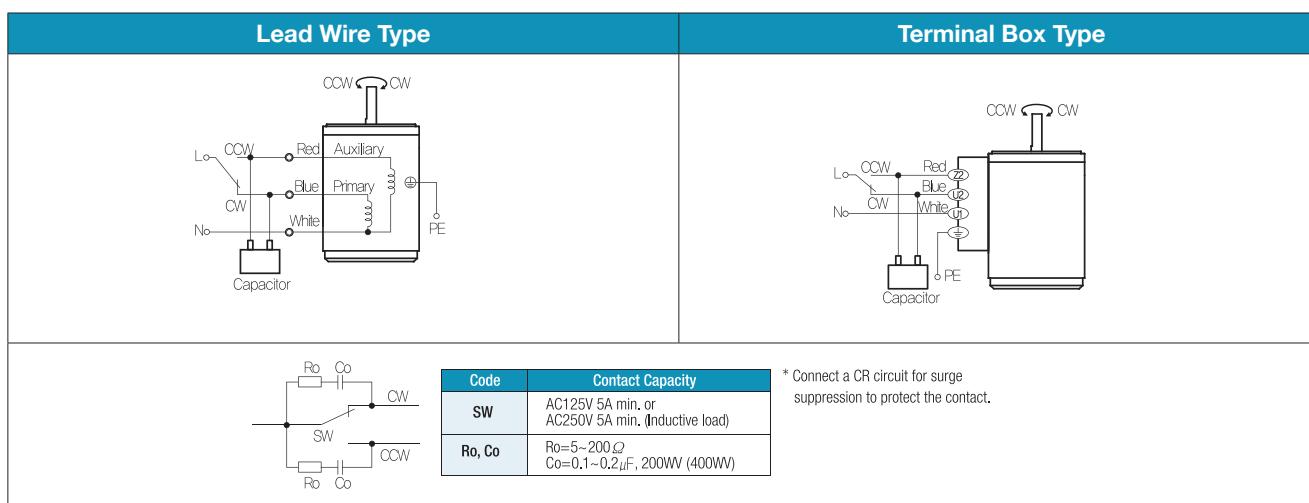




Dimensions

MOTOR ONLY

- MOTOR MODEL: 6RDD□-6(-T) (NO FAN)

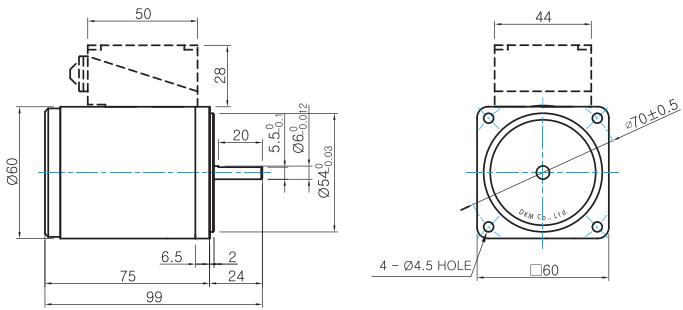


- MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	


GEARED MOTOR

G TYPE GEARHEAD

- MOTOR MODEL: 6RDG□-6G (NO FAN)

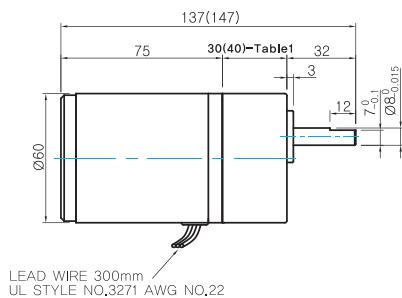

- GEARHEAD MODEL: 6GBD□MH



● 30(40)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH - 6GBD18MH
40	6GBD20MH - 6GBD250MH

- GEARHEAD OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

WEIGHT

PART	WEIGHT(Kg)
MOTOR	0,7
GEAR HEAD	6GBD3MH ~ 6GBD18MH
	0,3
	6GBD20MH ~ 6GBD40MH
6GBD50MH ~ 6GBD250MH	0,32
6GBD50MH ~ 6GBD250MH	0,34

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr></tbody></table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- During operation it is available to change the rotating direction by turning the switch to CW or CCW.



B AC Motors

Reversible Motor 6W(□ 70mm)

6W Reversible Motor 6W(□ 70mm)

Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m	Rated Load			Capacitor μF / VAC
Lead Wire Type	Terminal Box Type							Speed r/min	Current A	Torque kgfcm N.m	
7RDGA-6G	7RDGA-6G-T	6	1Ø110	60	4	30min.	0.64 0.064	1600	0.29	0.50 0.050	3.0 / 250
7RDGD-6G	7RDGD-6G-T	6	1Ø220	60	4	30min.	0.85 0.085	1600	0.16	0.60 0.060	1.0 / 450
7RDGE-6G	7RDGE-6G-T	6	1Ø220 1Ø240	50	4	30min.	0.61 0.061 0.75 0.075	1250	0.13 0.14 0.76 0.076	0.68 0.068 0.76 0.076	0.8 / 450

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching gearhead and D-Cut Type Shaft is for using motor only.

Max. Permissible Torque at Output Shaft of Gearhead

60Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG-6G	7GBK-BMH	kgfcm N.m	1.5 0.15	1.8 0.18	3.0 0.29	3.7 0.37	4.5 0.44	6.2 0.61	7.5 0.73	9.0 0.88	11.3 1.10	13.5 1.32	14.7 1.44	20.4 2.00	24.5 2.40	30.6 3.00	36.7 3.60	40.8 4.00	49.0 4.80	50.0 4.90	50.0 4.90

50Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG-6G	7GBK-BMH	kgfcm N.m	1.7 0.17	2.0 0.20	3.4 0.33	4.2 0.41	5.1 0.50	7.1 0.69	8.5 0.83	10.2 1.00	12.8 1.25	15.3 1.50	16.6 1.63	23.1 2.27	27.7 2.72	34.7 3.40	41.6 4.08	46.2 4.53	50.0 4.90	50.0 4.90	50.0 4.90

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the gearhead model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images






Dimensions

MOTOR ONLY

- MOTOR MODEL: 7RDD□-6(-T) (NO FAN)

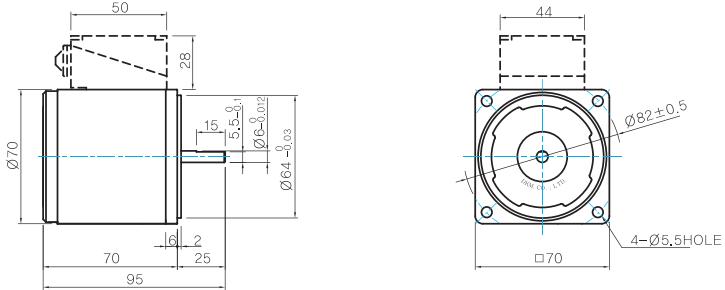


- MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

GEARED MOTOR


G TYPE GEARHEAD

- MOTOR MODEL: 7RDG□-6G (NO FAN)

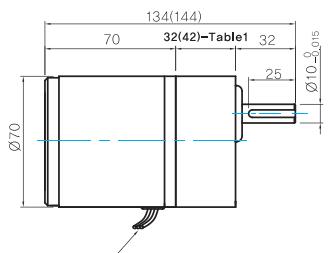

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 7GBK□BMH

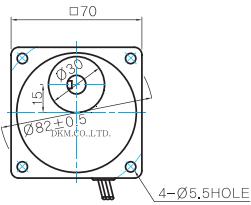


- GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

WEIGHT

PART	WEIGHT(Kg)
MOTOR	0,84
7GBK3BMH ~ 7GBK18BMH	0,36
7GBK25BMH ~ 7GBK30BMH	0,44
7GBK36MH ~ 7GBK180MH	0,5

- KEY SPEC

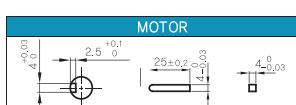

- 32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH – 7GBK18BMH
42	7GBK25BMH – 7GBK180BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)</td></tr></tbody></table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)						

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- During operation it is available to change the rotating direction by turning the switch to CW or CCW.



B AC Motors

Reversible Motor 10W(□ 70mm)

10W Reversible Motor 10W(□ 70mm)

Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load			Capacitor μF / VAC	
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
7RDGA-10G	7RDGA-10G-T	10	1Ø110	60	4	30min.	0.83	0.083	1550	0.31	0.70	0.070	3.5 / 250
7RDGD-10G	7RDGD-10G-T	10	1Ø220	60	4	30min.	1.00	0.100	1550	0.20	0.79	0.079	1.2 / 450
7RDGE-10G	7RDGE-10G-T	10	1Ø220	50	4	30min.	0.86	0.086	1250	0.16	0.82	0.082	1.0 / 450
			1Ø240				0.99	0.099		0.18	0.90	0.090	

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching gearhead and D-Cut Type Shaft is for using motor only.

Max. Permissible Torque at Output Shaft of Gearhead

60Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG-10G	7GBK-BMH	kgfcm N.m	2.0 0.19	2.4 0.23	3.9 0.39	4.9 0.48	5.9 0.58	8.2 0.80	9.8 0.96	11.8 1.16	14.8 1.45	17.8 1.74	19.3 1.90	26.9 2.63	32.2 3.16	40.3 3.95	48.3 4.74	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90

50Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG-10G	7GBK-BMH	kgfcm N.m	2.2 0.22	2.7 0.26	4.5 0.44	5.6 0.55	6.7 0.66	9.3 0.92	11.2 1.10	13.4 1.32	16.9 1.65	20.3 1.98	22.0 2.16	30.6 3.00	36.7 3.60	45.9 4.50	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the gearhead model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images






Dimensions

MOTOR ONLY

- MOTOR MODEL: 7RDD □-10(-T) (NO FAN)

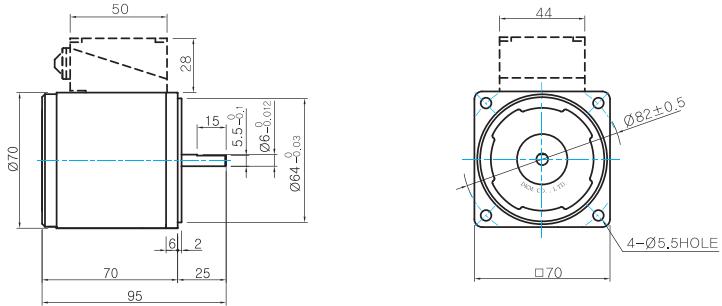


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	


GEARED MOTOR

G TYPE GEARHEAD

- MOTOR MODEL: 7RDG □-10G (NO FAN)

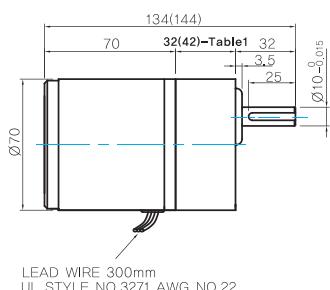

- GEARHEAD MODEL: 7GBK □BMH

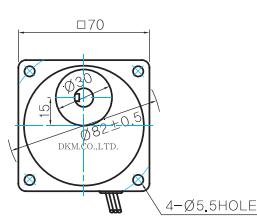


GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

WEIGHT

PART	WEIGHT(Kg)
MOTOR	0.84
7GBK3BMH ~ 7GBK18BMH	0.36
GEAR HEAD	0.44
7GBK25BMH ~ 7GBK30BMH	0.44
7GBK36MH ~ 7GBK180MH	0.5

KEY SPEC

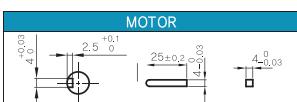

32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH ~ 7GBK18BMH
42	7GBK25BMH ~ 7GBK180BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"> <thead> <tr> <th>Code</th> <th>Contact Capacity</th> </tr> </thead> <tbody> <tr> <td>SW</td> <td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td> </tr> <tr> <td>Ro, Co</td> <td>Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)</td> </tr> </tbody> </table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)						

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- During operation it is available to change the rotating direction by turning the switch to CW or CCW.



B AC Motors

Reversible Motor 15W(□ 70mm)

15W Reversible Motor 15W(□ 70mm)

Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m	Rated Load			Capacitor μF / VAC
Lead Wire Type	Terminal Box Type							Speed r/min	Current A	Torque kgfcm N.m	
7RDGA-15G	7RDGA-15G-T	15	1Ø110	60	4	30min.	1.30 0.130	1600	0.46	1.05 0.105	6.0 / 250
7RDGD-15G	7RDGD-15G-T	15	1Ø220	60	4	30min.	1.25 0.125	1600	0.23	1.10 0.110	1.5 / 450
7RDGE-15G	7RDGE-15G-T	15	1Ø220 1Ø240	50	4	30min.	1.10 0.110 1.30 0.130	1250	0.17 0.18	1.25 1.45	0.125 0.145
											1.2 / 450

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching gearhead and D-Cut Type Shaft is for using motor only.

Max. Permissible Torque at Output Shaft of Gearhead

60Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	600	500	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
7RDG□-15G	7GBK□BMH	kgfcm N.m	2.7 0.27	3.3 0.32	5.5 0.54	6.8 0.67	8.2 0.81	11.4 1.12	13.7 1.34	16.4 1.61	20.6 2.02	24.8 2.43	26.9 2.64	37.4 3.67	44.9 4.40	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90	50.0 4.90

50Hz

Motor Model	Gearhead Model	Gear Ratio	3	3.6	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
		r/min	500	416	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
7RDG□-15G	7GBK□BMH	kgfcm N.m	3.1 0.31	3.7 0.37	6.2 0.61	7.8 0.76	9.3 0.92	13.0 1.27	15.6 1.53	18.7 1.83	23.4 2.30	28.1 2.76	30.6 3.00	42.5 4.17	50.0 4.90						

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the gearhead model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

Motor Images







Dimensions

MOTOR ONLY

● MOTOR MODEL: 7RDD□-15(-T) (NO FAN)

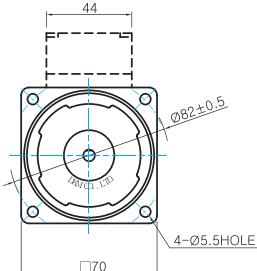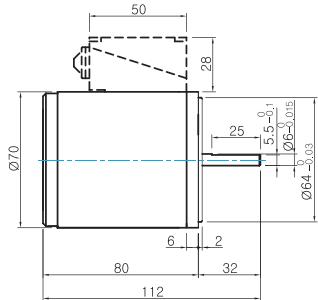


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	


GEARED MOTOR

G TYPE GEARHEAD

● MOTOR MODEL: 7RDG□-15G (NO FAN)

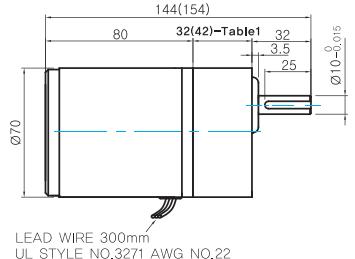

● GEARHEAD MODEL: 7GBK□BMH




GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

WEIGHT

PART	WEIGHT(Kg)
MOTOR	1.04
7GBK3BMH ~ 7GBK18BMH	0.36
7GBK25BMH ~ 7GBK30BMH	0.44
7GBK36MH ~ 7GBK180MH	0.5

KEY SPEC

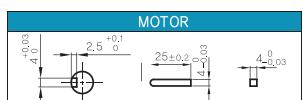

32(42)-Table1

SIZE(mm)	GEAR RATIO
32	7GBK3BMH ~ 7GBK18BMH
42	7GBK25BMH ~ 7GBK180BMH

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)</td></tr></tbody></table>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω, Co=0.1~0.2μF, 200WV (400W)						



- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.



Dimensions

MOTOR ONLY

- MOTOR MODEL: 8RDD□-15(-T) (NO FAN)

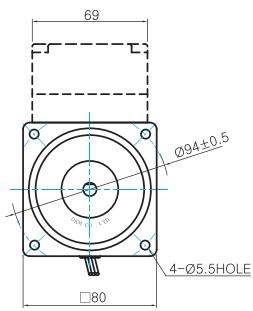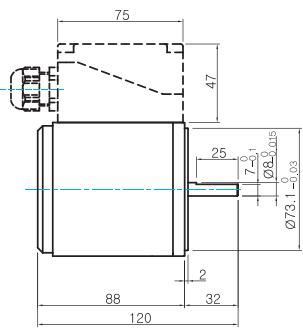


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

INTER-DECIMAL GEARHEAD


- MODEL: 8XD10M□

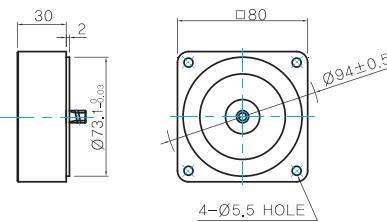

GEARED MOTOR


G TYPE GEARHEAD

- MOTOR MODEL: 8RDG□-15G (NO FAN)

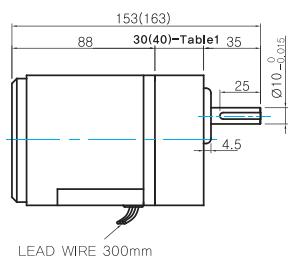

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 8GBK□BMH



GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

KEY SPEC


GEARHEAD

30(40)-Table1

SIZE(mm)	GEAR RATIO
30	8GBK3BMH ~ 8GBK18BMH
40	8GBK25BMH ~ 8GBK360BMH


W TYPE GEARHEAD

- MOTOR MODEL: 8RDG□-15W (NO FAN)

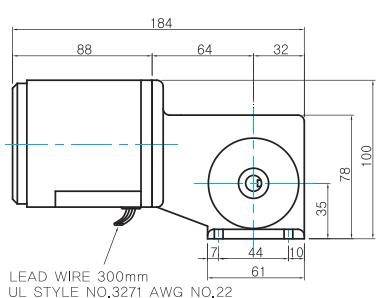


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 8WD□BL/BR/BRL

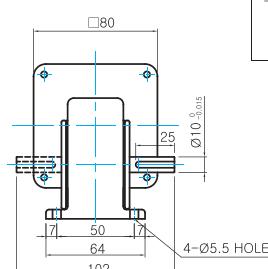


KEY SPEC

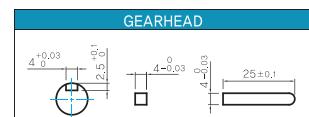

WEIGHT

PART	WEIGHT(Kg)
MOTOR	1.6
GEAR HEAD	8GBK3BMH ~ 8GBK18BMH 0.48
	8GBK25BMH ~ 8GBK30BMH 0.61
	8GBK36BMH ~ 8GBK180BMH 0.67
	8GBK200BMH ~ 8GBK360BMH 0.63
	8WD□BL/BR/BRL 0.67
8XD10M□	0.44

Motor Images

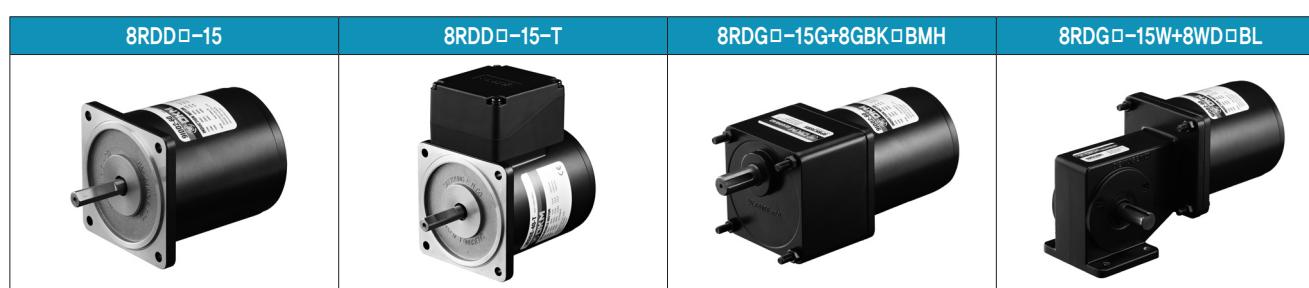



B AC Motors

Reversible Motor 15W(□80mm)

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr></tbody></table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.




B AC Motors

Reversible Motor 25W(□80mm)

Dimensions

MOTOR ONLY

- MOTOR MODEL: 8RDD □-25(-T) (NO FAN)

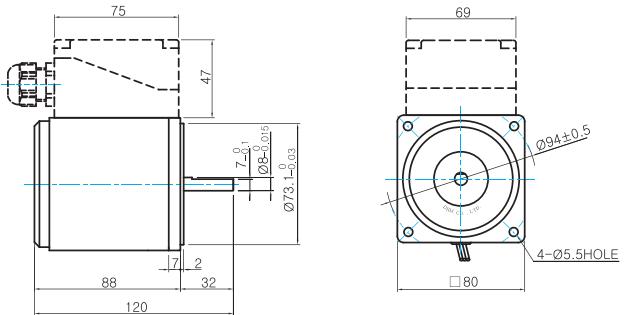


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

INTER-DECIMAL GEARHEAD


- MODEL: 8XD10M □

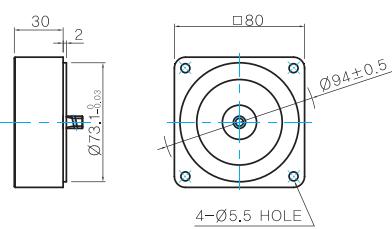


GEARED MOTOR

G TYPE GEARHEAD

- MOTOR MODEL: 8RDG □-25G (NO FAN)

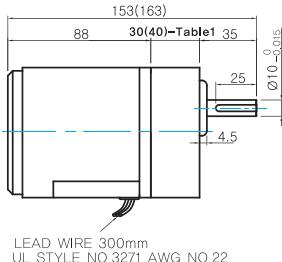


- GEARHEAD MODEL: 8GBK □BMH



GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	

KEY SPEC

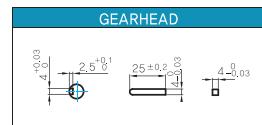


30(40)-Table1


SIZE(mm)	GEAR RATIO
30	8GBK3BMH - 8GBK18BMH
40	8GBK25BMH - 8GBK360BMH

W TYPE GEARHEAD


- MOTOR MODEL: 8RDG □-25W (NO FAN)

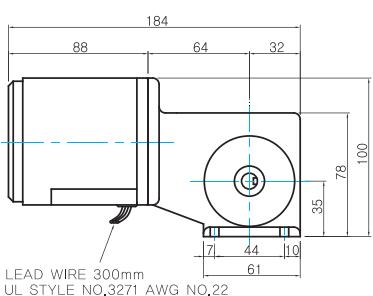

- GEARHEAD MODEL: 8WD □BL/BR/BRL

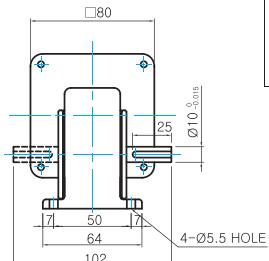

KEY SPEC

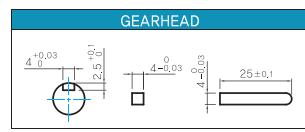

WEIGHT


PART	WEIGHT(Kg)	
	MOTOR	GEAR HEAD
MOTOR	1.6	
8GBK3BMH ~ 8GBK18BMH	0.48	
8GBK25BMH ~ 8GBK30BMH	0.61	
8GBK36BMH ~ 8GBK180BMH	0.67	
8GBK200BMH ~ 8GBK360BMH	0.63	
8WD □BL/BR/BRL	0.67	
8XD10M □	0.44	



Motor Images



Connection Diagrams

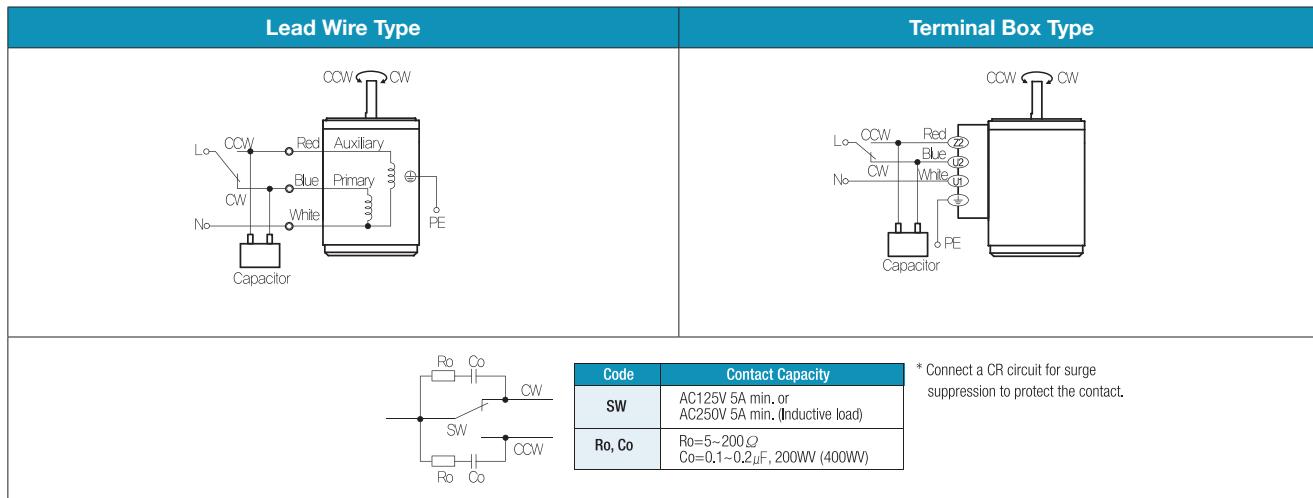

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.



B AC Motors

Reversible Motor 40W(□90mm)

40W Reversible Motor 40W(□90mm)

Motor Specification

Model 9RDG*-40□(-T): Gear Type Shaft 9RDD*-40(-T): D-Cut Type Shaft 9RDK*-40(-T): Key Type Shaft	Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque kgfcm N.m	Rated Load			Capacitor μF / VAC			
							Speed r/min	Current A	Torque kgfcm N.m				
							Lead Wire Type	Terminal Box Type					
9RDGA-40□	9RDGA-40□-T	40	1Ø110	60	4	30min.	4.20	0.420	1600	1.25	2.60	0.260	16.0 / 250
9RDGD-40□	9RDGD-40□-T	40	1Ø220	60	4	30min.	4.20	0.420	1600	0.61	2.60	0.260	4.0 / 450
9RDGE-40□	9RDGE-40□-T	40	1Ø220	50	4	30min.	3.00	0.300	1350	0.36	3.00	0.300	3.0 / 450
			1Ø240				3.60	0.360		0.39	3.40	0.340	

1) Enter the phase & voltage code in the place * and enter the model type of attaching gearhead in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching gearhead and D-Cut & Key Type Shafts are for using motor only.

Max. Permissible Torque at Output Shaft of Gearhead

60Hz

Motor Model	Gearhead Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	900	600	500	360	300	240	200	180	144	120	100	72	60	50	45	36	30	24	20	18	15	12	10
9RDG□-40G	9GBK□BMH	kgfcm N.m	4.3 0.42	6.5 0.63	7.8 0.76	10.8 1.06	12.9 1.27	16.2 1.59	19.4 1.90	21.6 2.11	27.0 2.64	32.4 3.17	35.1 3.44	48.8 4.78	58.5 5.73	63.6 6.24	70.7 6.93	88.4 8.66	100.0 9.80	100.0 9.80	100.0 9.80	100.0 9.80	100.0 9.80	100.0 9.80	

Motor Model	Gearhead Model	Gear Ratio	10	12	15	18	25	30	36	50	60
		r/min	180	150	120	100	72	60	50	36	30
9RDG□-40W	9WD□BL/□BR/ □BRL	kgfcm N.m	21.3 2.09	25.0 2.45	30.0 2.94	34.6 3.39	45.5 4.46	51.5 5.05	59.9 5.87	78.0 7.64	85.8 8.41

50Hz

Motor Model	Gearhead Model	Gear Ratio	2	3	3.6	5	6	7.5	9	10	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180
		r/min	750	500	417	300	250	200	167	150	120	100	83	60	50	42	38	30	25	20	17	15	13	10	8
9RDG□-40G	9GBK□BMH	kgfcm N.m	5.6 0.55	8.5 0.83	10.2 1.00	14.1 1.38	16.9 1.66	21.2 2.07	25.4 2.49	28.2 2.77	35.3 3.46	42.3 4.15	45.9 4.50	63.8 6.25	76.5 7.50	83.2 8.16	92.5 9.06	100.0 9.80							
9RDG□-40W	9WD□BL/□BR/ □BRL	kgfcm N.m	27.9 2.73	32.6 3.20	39.3 3.85	45.3 4.44	59.5 5.83	67.3 6.60	78.3 7.68	102.0 10.00	112.2 11.00														

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the gearhead model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.



4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.



Dimensions

MOTOR ONLY

- MOTOR MODEL: 9RDD□-40(-T) (NO FAN)

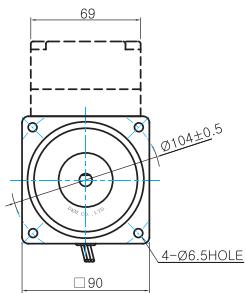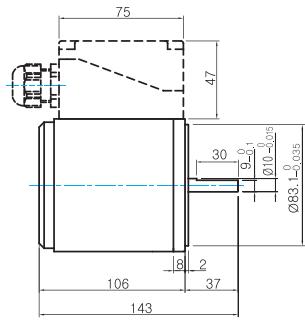


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	37 30 Ø104±0.5 Ø83.1±0.035
KEY TYPE	37 25 Ø104±0.5 Ø83.1±0.035

INTER-DECIMAL GEARHEAD


- MODEL: 9XD10M□

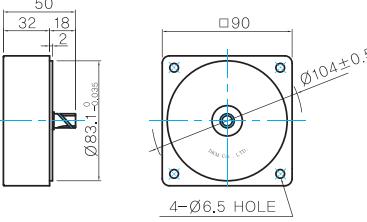


GEARED MOTOR

G TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-40G (NO FAN)

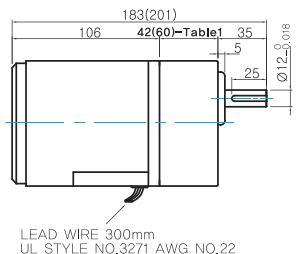


- GEARHEAD MODEL: 9GBK□BMH



GEARHEAD OUTPUT SHAFT

MODEL	SPEC
KEY TYPE	35 25 Ø12.5±0.08

KEY SPEC

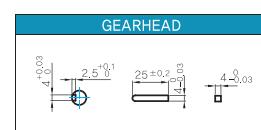


42(60)-Table1


SIZE(mm)	GEAR RATIO
42	9GBK2BMH - 9GBK15BMH
60	9GBK18BMH - 9GBK180BMH

W TYPE GEARHEAD


- MOTOR MODEL: 9RDG□-40W (NO FAN)

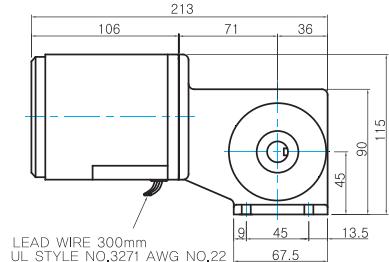

- GEARHEAD MODEL: 9WD□BL/BR/BRL

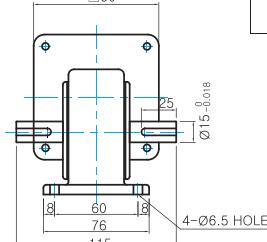

KEY SPEC

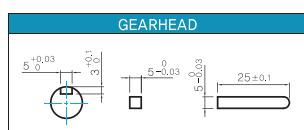

WEIGHT


PART	WEIGHT(Kg)
	MOTOR
GEAR HEAD	2.4
	9GBK2BMH ~ 9GBK15BMH 0.67
	9GBK18BMH ~ 9GBK30BMH 0.96
	9GBK36BMH ~ 9GBK180BMH 1.07
	9WD□BL/BR/BRL 1.0
9XD10M□	0.5



B AC Motors

Reversible Motor 40W(□90mm)

Motor Images

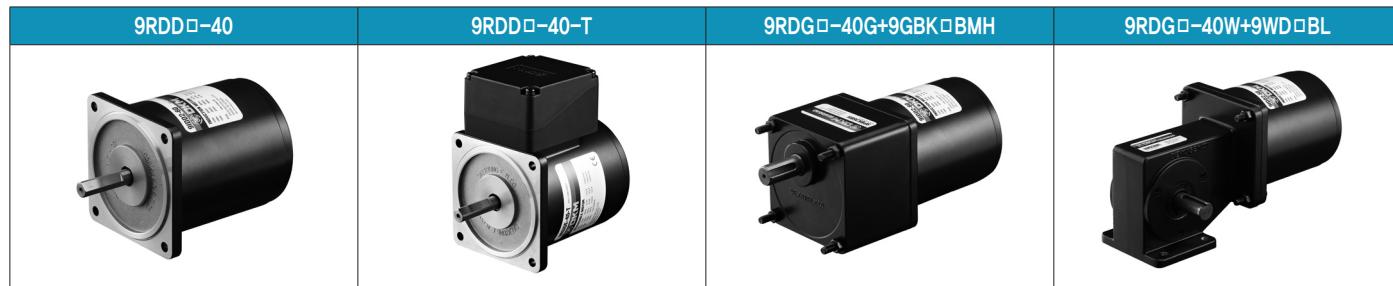

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr></tbody></table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.




B AC Motors

Reversible Motor 60W(□90mm)

Dimensions


MOTOR ONLY

- MOTOR MODEL: 9RDD□-60F(-T) (GENERAL FAN)

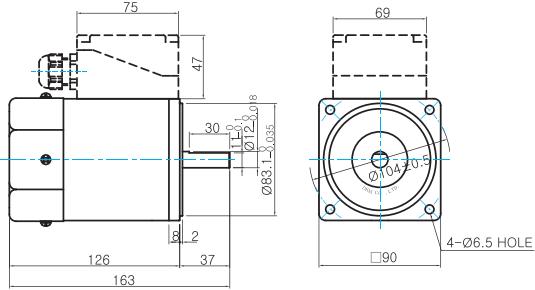


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-60F	37 30 25 ±0.2 Ø104±0.5 Ø12.5±0.08
KEY TYPE	
9RDK□-60F	37 25 ±0.2 Ø104±0.5 Ø12.5±0.08



INTER-DECIMAL GEARHEAD


- MODEL: 9XD10M□



GEARED MOTOR


P TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-60FP (GENERAL FAN)

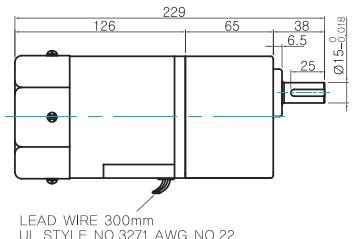


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 9PBK□BH




- GEARHEAD MODEL: 9PFK□BH

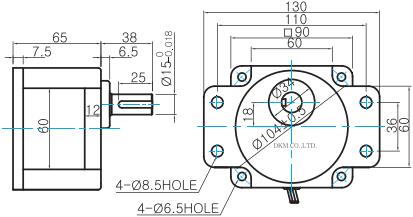

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	
9PBK□BH 9PFK□BH	38 25 ±0.2 Ø15.5±0.08

KEY SPEC




H TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-60FH (GENERAL FAN)

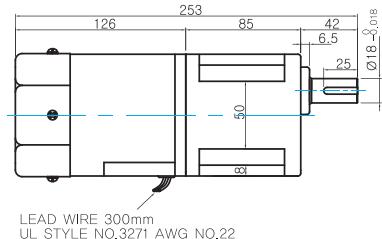


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 9HBK□BH




- GEARHEAD MODEL: 9HFK□BH

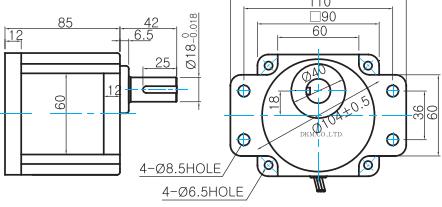

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	
9HBK□BH 9HFK□BH	42 25 ±0.2 Ø18.0±0.08

KEY SPEC




W TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-60FW (GENERAL FAN)

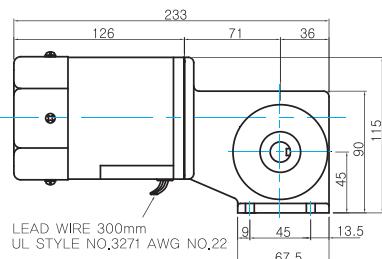


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL: 9WD□BL/BR/BRL

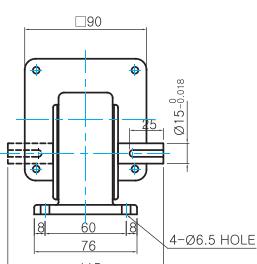


KEY SPEC

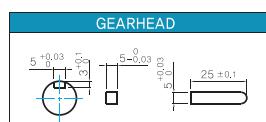




WH TYPE GEARHEAD


- MOTOR MODEL:
9RDG□-90FWH (GENERAL FAN)

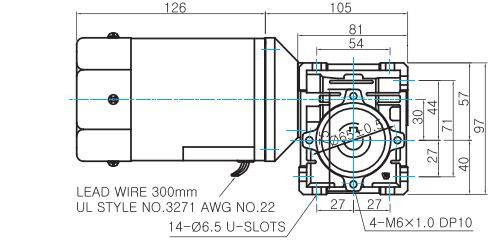


- GEARHEAD MODEL:
9WHD□

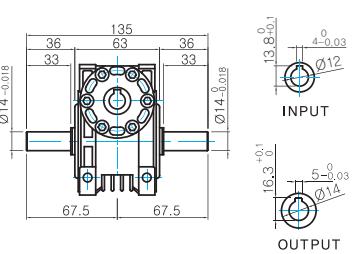

- SHAFT(Unidirectional, Bi-directional)

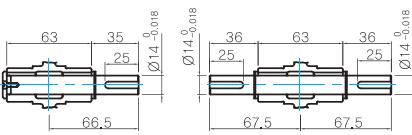


FLANGE

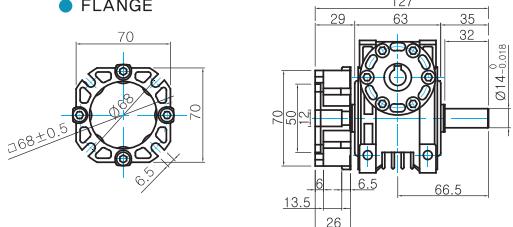

* The output flange and shafts are sold separately.

KEY SPEC

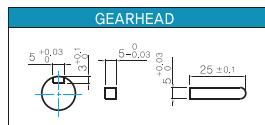

WEIGHT

PART	WEIGHT(Kg)
MOTOR	3.0
9PB(F)K2BH ~ 9PB(F)K18BH	1.3
9PB(F)K20BH ~ 9PB(F)K180BH	1.4
9HB(F)K3BH ~ 9HB(F)K9BH	1.45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1.5
9HB(F)K20BH ~ 9HB(F)K60BH	1.7
9HB(F)K75BH ~ 9HB(F)K180BH	1.8
9WD□BL/BR/BRL	1.0
9WHD□	1.13
9XD10M□	0.5

Motor Images








B AC Motors

Reversible Motor 60W(□90mm)

Connection Diagrams

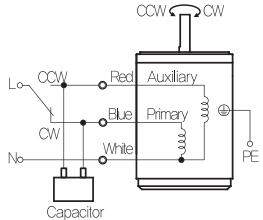Lead Wire Type	Terminal Box Type					
						
 <table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr></tbody></table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity					
SW	AC125V 5A min. AC250V 5A min. (Inductive load)					
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)					

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.




B AC Motors

Reversible Motor 90W(□90mm)

Dimensions

MOTOR ONLY

- MOTOR MODEL:
9RDD □-90F(-T) (GENERAL FAN)

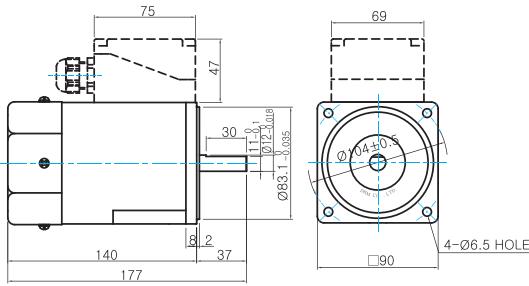


MOTOR OUTPUT SHAFT

- KEY SPEC

MODEL	SPEC
D-CUT TYPE 9RDD □-90F	
KEY TYPE 9RDK □-90F	

INTER-DECIMAL GEARHEAD


- MODEL: 9XD10M □

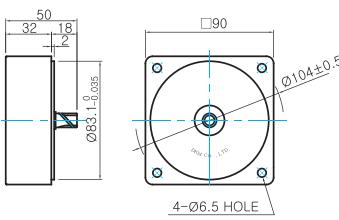


GEARED MOTOR

P TYPE GEARHEAD


- MOTOR MODEL:
9RDG □-90FP (GENERAL FAN)

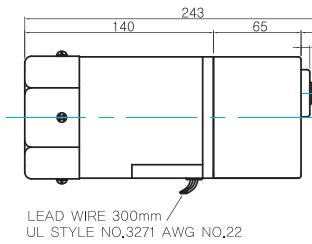

- GEARHEAD MODEL:
9PBK □BH




- GEARHEAD MODEL:
9PFK □BH

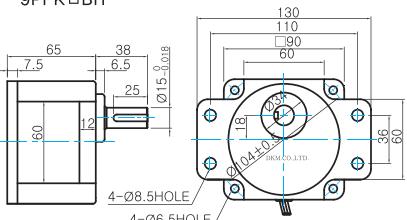

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9PBK □BH	
9PFK □BH	

KEY SPEC




H TYPE GEARHEAD


- MOTOR MODEL:
9RDG □-90FH (GENERAL FAN)

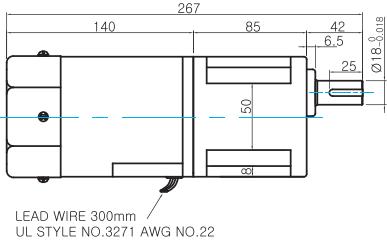

- GEARHEAD MODEL:
9HBK □BH




- GEARHEAD MODEL:
9HFK □BH

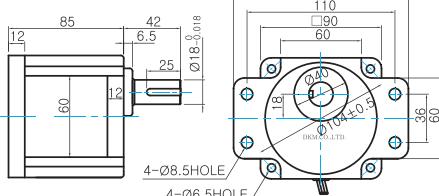

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9HBK □BH	
9HFK □BH	

KEY SPEC




W TYPE GEARHEAD


- MOTOR MODEL:
9RDG □-90FW (GENERAL FAN)

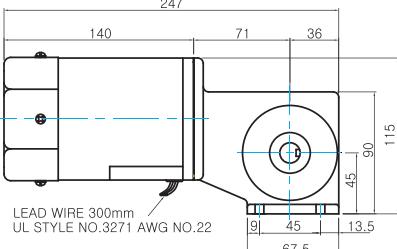

- GEARHEAD MODEL:
9WD □BL/BR/BRL

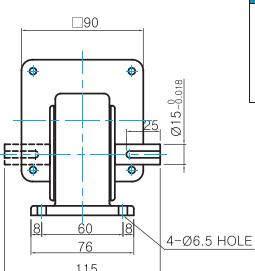


KEY SPEC

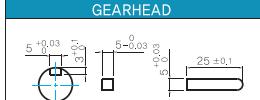




WH TYPE GEARHEAD


MOTOR MODEL:
9RDG□-90FWH (GENERAL FAN)

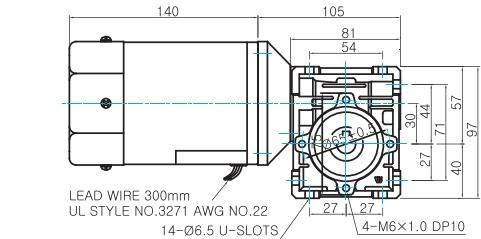

GEARHEAD MODEL:
9WHD□

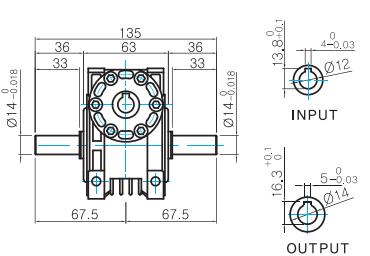


SHAFT (Unidirectional, Bi-directional)

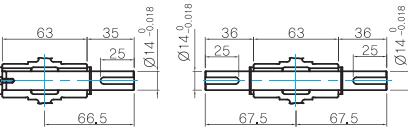


WEIGHT

PART	WEIGHT(Kg)
MOTOR	3,0
9PB(F)K2BH ~ 9PB(F)K18BH	1,3
9PB(F)K20BH ~ 9PB(F)K180BH	1,4
9HB(F)K3BH ~ 9HB(F)K9BH	1,45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1,5
9HB(F)K20BH ~ 9HB(F)K60BH	1,7
9HB(F)K75BH ~ 9HB(F)K180BH	1,8
9WD□BL/BR/BRL	1,0
9WHD□	1,13
9XD10M□	0,5

FLANGE

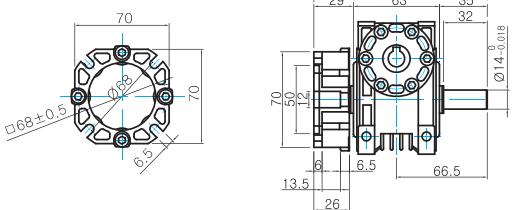

KEY SPEC

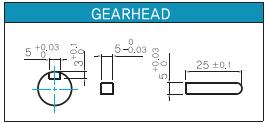

* The output flange and shafts are sold separately.

Motor Images








B AC Motors

Reversible Motor 90W(□ 90mm)

Connection Diagrams

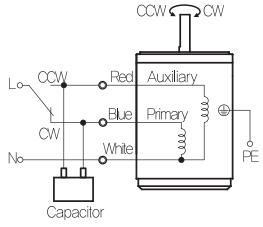Lead Wire Type	Terminal Box Type						
							
 <table border="1"><thead><tr><th>Code</th><th>Contact Capacity</th></tr></thead><tbody><tr><td>SW</td><td>AC125V 5A min. AC250V 5A min. (Inductive load)</td></tr><tr><td>Ro, Co</td><td>Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td></tr></tbody></table>	Code	Contact Capacity	SW	AC125V 5A min. AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)	* Connect a CR circuit for surge suppression to protect the contact.
Code	Contact Capacity						
SW	AC125V 5A min. AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.




B AC Motors

Reversible Motor 120W(□90mm)

Dimensions

MOTOR ONLY

- MOTOR MODEL: 9RDD□-120F(-T) (GENERAL FAN)

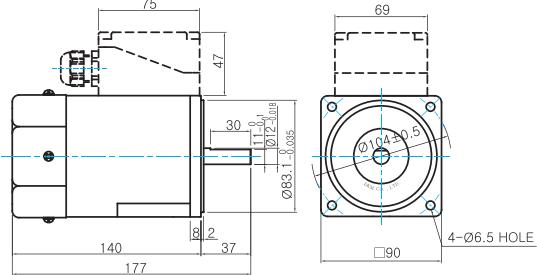


MOTOR OUTPUT SHAFT

- KEY SPEC

MODEL	SPEC	MOTOR
D-CUT TYPE 9RDD□-120F	37 30 15 Ø15.0±0.08	2.5 ^{+0.1} 4 ^{+0.03} 25 ^{+0.2} 12 ^{+0.3} 4 ^{+0.03}
KEY TYPE 9RDK□-120F	37 25 12 ^{+0.3}	25 ^{+0.2} 12 ^{+0.3}

INTER-DECIMAL GEARHEAD


- MODEL: 9XD10M□

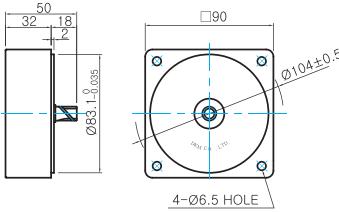

GEARED MOTOR


P TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-120FP (GENERAL FAN)

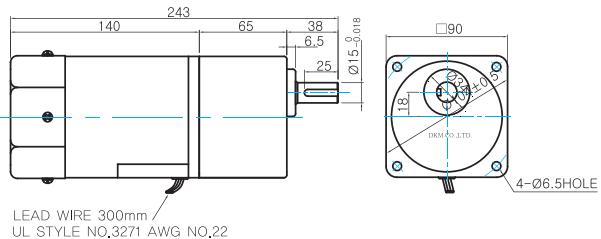

- GEARHEAD MODEL: 9PBK□BH


- GEARHEAD MODEL: 9PFK□BH

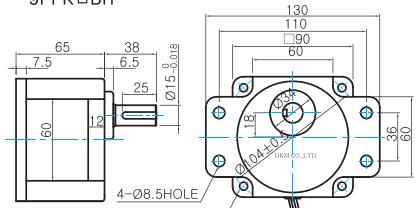

- GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9PBK□BH 9PFK□BH	38 25 Ø15.0±0.08

KEY SPEC




H TYPE GEARHEAD

- MOTOR MODEL: 9RDG□-120FH (GENERAL FAN)

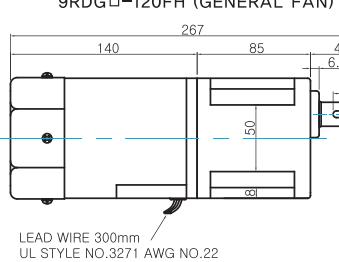

- GEARHEAD MODEL: 9HBK□BH


- GEARHEAD MODEL: 9HFK□BH

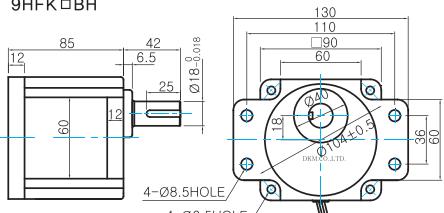

- GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE 9HBK□BH 9HFK□BH	42 25 Ø18.0±0.08

KEY SPEC




W TYPE GEARHEAD


- MOTOR MODEL: 9RDG□-120FW (GENERAL FAN)

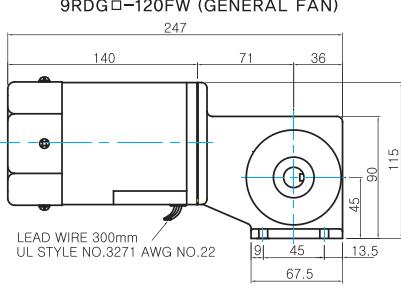

- GEARHEAD MODEL: 9WD□BL/BR/BRL

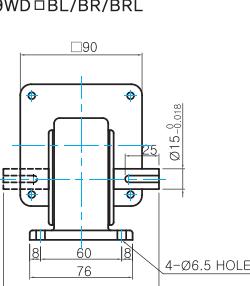


KEY SPEC

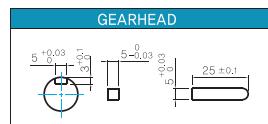




WH TYPE GEARHEAD


- MOTOR MODEL:
9RDG□-120FWH (GENERAL FAN)

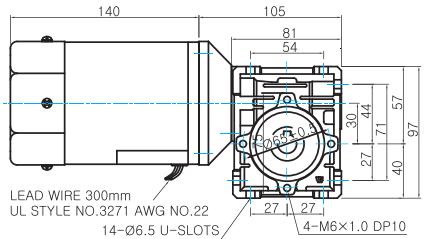


- GEARHEAD MODEL:
9WHD□

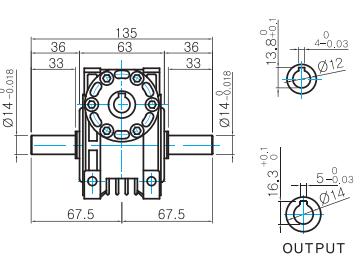


- SHAFT (Unidirectional, Bi-directional)

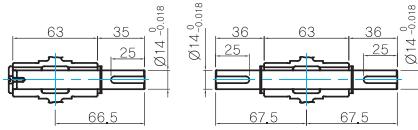

FLANGE



KEY SPEC

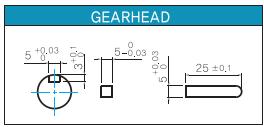

* The output flange and shafts are sold separately.

WEIGHT

PART	WEIGHT(Kg)
MOTOR	3,0
9PB(F)K2BH ~ 9PB(F)K18BH	1.3
9PB(F)K20BH ~ 9PB(F)K180BH	1.4
9HB(F)K3BH ~ 9HB(F)K9BH	1.45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1.5
9HB(F)K20BH ~ 9HB(F)K60BH	1.7
9HB(F)K75BH ~ 9HB(F)K180BH	1.8
9WD□BL/BR/BRL	1.0
9WHD□	1.13
9XD10M□	0,5

Motor Images

