



**APEX DYNAMICS, INC.**

**HIGH PERFORMANCE  
HYPOID GEARBOX**

**KH / KF Series**



# Planetary Gearbox Series

## ► Features:

**Innovative Hypoid Helical Bevel Gear**

**Optimized Inertia Moment**

**High Positioning Accuracy**

**High Efficiency**

**Low Noise**

**Long Service Life**

**Flexible Mounting**

**Multiple Output Types**

**Same Rotating Direction on Output as the Servo-Motor**

The output shaft of APEX K-series rotates in the same direction as the servo-motor that simplifies the machine control and setting.



**KH**

**KF-S1 / S2**

**KF-S3**

**KF-S4**



© 2019 by APEX DYNAMICS, INC.

APEX DYNAMICS, INC. reserves modification and copyrights of all technical specifications, illustrations and drawings in this catalog in allowance for continuous products development and advancement.

For the newest data and information, please visit <http://www.apexdyna.com/>

# ORDERING CODE

**KF** — **010<sup>(1)</sup>** — **S1<sup>(2)</sup>** / **MOTOR**

**KH** — **010<sup>(1)</sup>** / **MOTOR**

Motor Type :  
Manufacturer and Model

Ratio<sup>(1)</sup>:

1-stage: 3, 4, 5, 7, 10

2-stage: 12, 16, 20, 25, 28, 35, 40, 50, 70, 100

Spiral Bevel

Ratio<sup>(1)</sup>:

1-stage: 1, 2

## Gear Size:

**KF** : KF060, KF075, KF100, KF140, KF180, KF210, KF240

**KF(Spiral Bevel)** : KF060, KF075, KF100, KF140, KF180, KF210, KF240

**KH** : KH064, KH090, KH110, KH140, KH200, KH255, KH285

**Ordering Example** : KF100 - 010 - S1 / SIEMENS 1FT6 041 - 4AF71

(1) Ratio ( $i = N_{in} / N_{out}$ ).

(2) S1 = Smooth Output Shaft.

S2 = Output Shaft with Key.

S3 = DIN 5480 Output Shaft.

S4 = Hollow Output Shaft.

# KH Gearbox Performance

| Model No.                                       | Stages    | Ratio <sup>(1)</sup>                    | KH 064 | KH 090 | KH 110 | KH 140 | KH 200 | KH 255 | KH 285 |                              |  |
|---|-----------|---|--------|--------|--------|--------|--------|--------|--------|------------------------------|--|
| Nominal Output Torque T <sub>2N</sub>           | 1         | 3                                       | 25     | 50     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 4                                       | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 5                                       | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 7                                       | 23     | 50     | 100    | 200    | 390    | 750    | 1400   |                              |  |
|   |           | 10                                      | 18     | 40     | 85     | 170    | 360    | 600    | 1100   |                              |  |
|   | 2         | 12                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 16                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 20                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 25                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 28                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 35                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 40                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 50                                      | 25     | 60     | 110    | 210    | 420    | 820    | 1600   |                              |  |
|   |           | 70                                      | 23     | 50     | 100    | 200    | 390    | 750    | 1400   |                              |  |
|   |           | 100                                     | 18     | 40     | 85     | 170    | 360    | 600    | 1100   |                              |  |
|   |           | Emergency Stop Torque T <sub>2NOT</sub> | Nm     | 1,2    | 3~100  |        |        |        |        |                              |  |
| Max. Acceleration Torque T <sub>2B</sub>        | Nm        | 1,2                                     | 3~100  |        |        |        |        |        |        | 1,5 times T <sub>2N</sub>    |  |
| No Load Running Torque <sup>(4)</sup>           | Nm        | 1                                       | 3~10   | 0.9    | 1.6    | 3.2    | 4.2    | 9.6    | 16.5   | 26.4                         |  |
|   |           | 2                                       | 12~100 | 0.1    | 0.1    | 0.2    | 0.4    | 1.1    | 1.9    | 3                            |  |
| Backlash <sup>(2)</sup>                         | arcmin    | 1                                       | 3~10   | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3                          |  |
|   |           | 2                                       | 12~100 | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3                          |  |
| Torsional Rigidity                              | Nm/arcmin | 1,2                                     | 3~100  | 1.1    | 4.5    | 10     | 23     | 54     | 90     | 170                          |  |
| Nominal Input Speed n <sub>1N</sub>             | rpm       | 1                                       | 3~10   | 3,000  | 2,800  | 2,700  | 2,000  | 2,000  | 2,000  | 1,500                        |  |
|   |           | 2                                       | 12~100 | 5,500  | 4,600  | 4,600  | 4,000  | 3,700  | 3,400  | 3,100                        |  |
| Max. Input Speed n <sub>1B</sub>                | rpm       | 1                                       | 3~10   | 6,000  | 6,000  | 4,500  | 4,500  | 4,000  | 3,000  | 2,500                        |  |
|   |           | 2                                       | 12~100 | 7,000  | 7,000  | 7,000  | 6,000  | 5,500  | 5,000  | 4,500                        |  |
| Max. Radial Load F <sub>2r</sub> <sup>(3)</sup> | N         | 1,2                                     | 3~100  | 2,400  | 4,500  | 5,100  | 13,000 | 28,700 | 36,200 | 58,300                       |  |
| Max. Axial Load F <sub>2a</sub> <sup>(3)</sup>  | N         | 1,2                                     | 3~100  | 1,200  | 2,250  | 2,550  | 6,500  | 14,350 | 18,100 | 29,150                       |  |
| Operating Temp                                  | ° C       | 1,2                                     | 3~100  |        |        |        |        |        |        | 0° C~ +90° C                 |  |
| Degree of Gearbox Protection                    |           | 1,2                                     | 3~100  |        |        |        |        |        |        | IP65                         |  |
| Lubrication                                     |           | 1,2                                     | 3~100  |        |        |        |        |        |        | Synthetic lubrication grease |  |
| Mounting Position                               |           | 1,2                                     | 3~100  |        |        |        |        |        |        | All directions               |  |
| Running Noise <sup>(4)</sup>                    | dB(A)     | 1,2                                     | 3~100  | ≤ 64   | ≤ 66   | ≤ 66   | ≤ 68   | ≤ 68   | ≤ 70   | ≤ 72                         |  |
| Efficiency η                                    | %         | 1                                       | 3~100  |        |        |        |        |        |        | ≥ 96%                        |  |
|   |           | 2                                       | 12~100 |        |        |        |        |        |        | ≥ 94%                        |  |


(1) Ratio (i= N<sub>in</sub> / N<sub>out</sub>) .

(2) Backlash is measured at 2% of Nominal Output Torque T<sub>2N</sub>.

(3) Applied to the output shaft center at 100 rpm.

(4) The dB values are measured by gearbox with ratio 10 (1-stage) or ratio 100 (2-stage), no loading at 3,000 RPM or at the respective Nominal Input Speed by bigger model size.

By lower ratio and/or higher RPM, the noise level could be 3 to 5 dB higher.

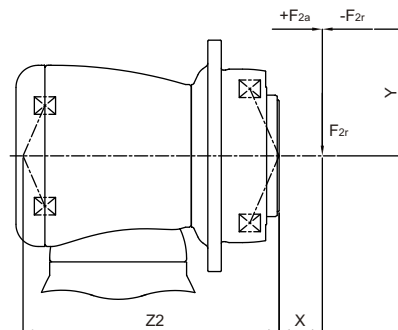

$$M_{2k} = \frac{F_{2a} \times Y + F_{2r} \times (X + Z_2)}{1000}$$

M<sub>2k</sub> : 【Nm】

F<sub>2a</sub> , F<sub>2r</sub> : 【N】

X , Y , Z<sub>2</sub> : 【mm】


| KH                   | KH 064 | KH 090 | KH 110 | KH 140 | KH 200 | KH 255 | KH 285 |
|----------------------|--------|--------|--------|--------|--------|--------|--------|
| Z <sub>2</sub> 【mm】  | 95.7   | 121.9  | 148.9  | 192.6  | 259.5  | 290.9  | 353.7  |
| M <sub>2k</sub> 【Nm】 | 230    | 460    | 760    | 1,730  | 3,870  | 7,800  | 15,200 |

# KH Gearbox Inertia

| Model No.              |                    | KH 064  |         | KH 090  |         | KH 110  |         | KH 140  |         | KH 200  |         | KH 255  |         | KH 285  |         |   |
|------------------------|--------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|
| $\emptyset^{(A)}$ (C3) |                    | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage |   |
| 8                      | kg.cm <sup>2</sup> | 0.1     | 0.1     | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       |   |
| 11                     |                    | 0.17    | 0.16    | 0.18    | 0.17    | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | - |
| 14                     |                    | 0.21    | 0.2     | 0.5     | 0.21    | -       | 0.53    | -       | -       | -       | -       | -       | -       | -       | -       | - |
| 19                     |                    | 0.62    | -       | 0.65    | 0.63    | 1.69    | 0.68    | -       | 1.83    | -       | -       | -       | -       | -       | -       | - |
| 24                     |                    | -       | -       | 4.49    | -       | 4.89    | 4.52    | 5.05    | 5.04    | -       | 5.63    | -       | -       | -       | -       | - |
| 28                     |                    | -       | -       | -       | -       | 6.14    | -       | 6.55    | 6.33    | -       | 7.18    | -       | -       | -       | -       | - |
| 32                     |                    | -       | -       | -       | -       | 8.54    | -       | 9.47    | 8.73    | 10.18   | 10.1    | -       | 12.63   | -       | -       | - |
| 35                     |                    | -       | -       | -       | -       | 13.86   | -       | 14.91   | 14.04   | 15.21   | 15.54   | 15.68   | 17.75   | 23.46   | 20.8    | - |
| 38                     |                    | -       | -       | -       | -       | 18.87   | -       | 20.69   | 19.05   | 20.7    | 21.32   | 21.69   | 23.26   | 23.46   | 27.05   | - |
| 42                     |                    | -       | -       | -       | -       | -       | -       | 22.58   | -       | 22.83   | 23.2    | 23.59   | 25.4    | 25.28   | 28.95   | - |
| 48                     |                    | -       | -       | -       | -       | -       | -       | 55.45   | -       | 58.45   | 56.07   | 59.3    | 61.02   | 61.61   | 64.66   | - |
| 55                     |                    | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | 86.95   | -       | 89.67   | -       | - |
| 60                     |                    | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | 112.49  | -       | - |




(A)  $\emptyset$  = Input shaft diameter.

# Permitted Radial And Axial Loads

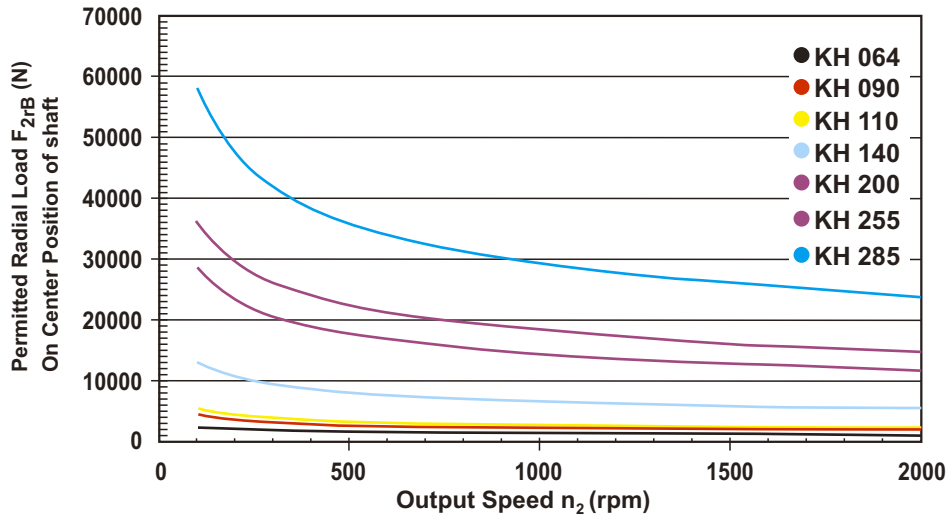

Permitted radial load  $F_{2r}$  on center of output flange on various output speeds.

# KH Series Dimension

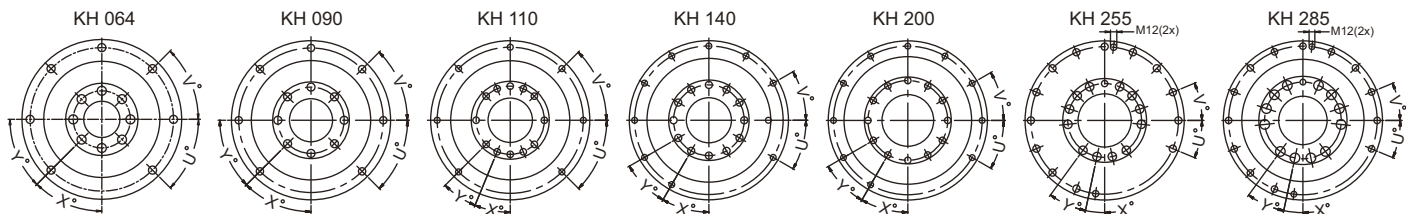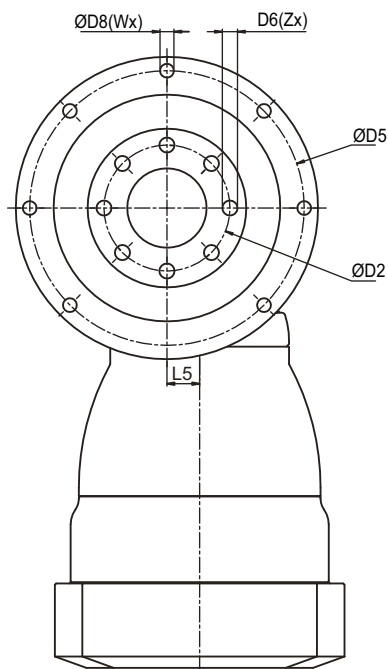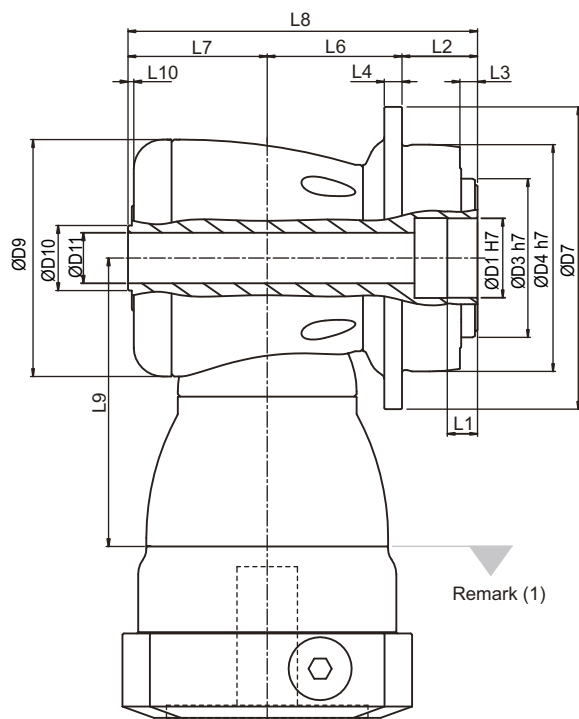

| Dimension | KH 064                  |           | KH 090    |          | KH 110      |             | KH 140    |             | KH 200    |  | KH 255    |  | KH 285    |  |
|-----------|-------------------------|-----------|-----------|----------|-------------|-------------|-----------|-------------|-----------|--|-----------|--|-----------|--|
|           | 1~2-stage               |           | 1~2-stage |          | 1~2-stage   |             | 1~2-stage |             | 1~2-stage |  | 1~2-stage |  | 1~2-stage |  |
| D1        | H7                      | 20        | 31.5      | 40       | 50          | 80          | 100       | 100         |           |  |           |  |           |  |
| D2        |                         | 31.5      | 50        | 63       | 80          | 125         | 140       | 160         |           |  |           |  |           |  |
| D3        | h7                      | 40        | 63        | 80       | 100         | 160         | 180       | 200         |           |  |           |  |           |  |
| D4        | h7                      | 64        | 90        | 110      | 140         | 200         | 255       | 285         |           |  |           |  |           |  |
| D5        |                         | 79        | 109       | 135      | 168         | 233         | 280       | 310         |           |  |           |  |           |  |
| D6        |                         | M5x0.8Px8 | M6x1Px10  | M6x1Px12 | M8x1.25Px15 | M10x1.5Px20 | M16x2Px25 | M20x2.5Px31 |           |  |           |  |           |  |
| D7        |                         | 88        | 120       | 147      | 180         | 249.5       | 302       | 332         |           |  |           |  |           |  |
| D8        |                         | 4.5       | 5.5       | 5.5      | 6.6         | 9           | 13.5      | 13.5        |           |  |           |  |           |  |
| D9        |                         | 73        | 94        | 116      | 163         | 210         | 255       | 300         |           |  |           |  |           |  |
| D10       |                         | 18.5      | 25.8      | 36.8     | 55.2        | 69.2        | 82.2      | 92.2        |           |  |           |  |           |  |
| D11       | +0.5 / 0 <sup>(2)</sup> | 10        | 20        | 28       | 40          | 55          | 62        | 70          |           |  |           |  |           |  |
| L1        |                         | 8         | 12        | 12       | 12          | 16          | 20        | 20          |           |  |           |  |           |  |
| L2        |                         | 19.5      | 30        | 29       | 38          | 50          | 66        | 75          |           |  |           |  |           |  |
| L3        |                         | 4         | 7         | 7        | 7.5         | 8.5         | 13.5      | 16.5        |           |  |           |  |           |  |
| L4        |                         | 5         | 7         | 8        | 10          | 12          | 18        | 20          |           |  |           |  |           |  |
| L5        |                         | 10        | 13        | 17       | 25          | 31          | 36        | 43          |           |  |           |  |           |  |
| L6        |                         | 43        | 53.5      | 67       | 81          | 117         | 132       | 160.5       |           |  |           |  |           |  |
| L7        |                         | 46        | 55.3      | 71.3     | 91.8        | 118         | 134       | 168         |           |  |           |  |           |  |
| L8        |                         | 108.5     | 138.8     | 167.3    | 210.8       | 285         | 332       | 403.5       |           |  |           |  |           |  |
| L9        |                         | 94        | 114.5     | 129      | 173.5       | 228         | 265.5     | 294.5       |           |  |           |  |           |  |
| L10       |                         | 1.5       | 2.3       | 3        | 2.8         | 3           | 3         | 3           |           |  |           |  |           |  |
| X         | in Degree               | 45°       | 45°       | 22.5°    | 30°         | 30°         | 12°       | 12°         |           |  |           |  |           |  |
| Y         | in Degree               | 45°       | 45°       | 22.5°    | 30°         | 30°         | 24°       | 24°         |           |  |           |  |           |  |
| Z         |                         | 8         | 8         | 12       | 12          | 12          | 12        | 12          |           |  |           |  |           |  |
| U         | in Degree               | 45°       | 45°       | 45°      | 30°         | 30°         | 22.5°     | 22.5°       |           |  |           |  |           |  |
| V         | in Degree               | 45°       | 45°       | 45°      | 30°         | 30°         | 22.5°     | 22.5°       |           |  |           |  |           |  |
| W         |                         | 7         | 7         | 7        | 10          | 10          | 13        | 13          |           |  |           |  |           |  |

(1) Dimensions are related to motor interface. Please contact APEX for details.

(2) Let through element max. Ø(D11-0.2)mm.

# KFGearbox Performance

| Model No.                                       | Stages    | Ratio <sup>(1)</sup>                    | KF 060                          | KF 075                       | KF 100                        | KF 140 | KF 180 | KF 210 | KF 240 |        |
|---|-----------|---|---------------------------------|------------------------------|-------------------------------|--------|--------|--------|--------|--------|
| Nominal Output Torque T <sub>2N</sub>           | 1         | 3                                       | 25                              | 50                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 4                                       | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 5                                       | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 7                                       | 23                              | 50                           | 100                           | 200    | 390    | 750    | 1400   |        |
|   |           | 10                                      | 18                              | 40                           | 85                            | 170    | 360    | 600    | 1100   |        |
|   | 2         | 12                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 16                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 20                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 25                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 28                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 35                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 40                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 50                                      | 25                              | 60                           | 110                           | 210    | 420    | 820    | 1600   |        |
|   |           | 70                                      | 23                              | 50                           | 100                           | 200    | 390    | 750    | 1400   |        |
|   |           | 100                                     | 18                              | 40                           | 85                            | 170    | 360    | 600    | 1100   |        |
|   |           | Emergency Stop Torque T <sub>2NOT</sub> | Nm                              | 1,2                          | 3~100 2 times T <sub>2N</sub> |        |        |        |        |        |
| Max. Acceleration Torque T <sub>2B</sub>        | Nm        | 1,2                                     | 3~100 1,5 times T <sub>2N</sub> |                              |                               |        |        |        |        |        |
| No Load Running Torque <sup>(4)</sup>           | Nm        | 1                                       | 3~10                            | 0.8                          | 1.3                           | 2.6    | 3.5    | 8      | 11     | 17.6   |
|   |           | 2                                       | 12~100                          | 0.1                          | 0.1                           | 0.2    | 0.3    | 0.9    | 1.2    | 1.9    |
| Backlash <sup>(2)</sup>                         | arcmin    | 1                                       | 3~10                            | ≤ 3                          | ≤ 3                           | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    |
|   |           | 2                                       | 12~100                          | ≤ 3                          | ≤ 3                           | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    | ≤ 3    |
| Torsional Rigidity                              | Nm/arcmin | 1,2                                     | 3~100                           | 0.8                          | 3.5                           | 9      | 20.5   | 44     | 80     | 168    |
| Nominal Input Speed n <sub>1N</sub>             | rpm       | 1                                       | 3~10                            | 3,000                        | 2,800                         | 2,700  | 2,000  | 2,000  | 2,000  | 1,500  |
|   |           | 2                                       | 12~100                          | 5,500                        | 4,500                         | 4,200  | 3,900  | 3,400  | 2,800  | 2,200  |
| Max. Input Speed n <sub>1B</sub>                | rpm       | 1                                       | 3~10                            | 6,000                        | 6,000                         | 4,500  | 4,500  | 4,000  | 3,000  | 2,500  |
|   |           | 2                                       | 12~100                          | 7,000                        | 7,000                         | 7,000  | 6,000  | 5,500  | 5,000  | 4,500  |
| Max. Radial Load F <sub>2r</sub> <sup>(3)</sup> | N         | 1,2                                     | 3~100                           | 5,700                        | 8,200                         | 12,200 | 20,100 | 30,700 | 40,900 | 51,900 |
| Max. Axial Load F <sub>2a</sub> <sup>(3)</sup>  | N         | 1,2                                     | 3~100                           | 2,850                        | 4,100                         | 6,100  | 10,050 | 15,350 | 20,450 | 20,950 |
| Service Life <sup>(5)</sup>                     | hr        | 1,2                                     | 3~100                           | 20,000                       |                               |        |        |        |        |        |
| Operating Temp                                  | ° C       | 1,2                                     | 3~100                           | 0° C~ +90° C                 |                               |        |        |        |        |        |
| Degree of Gearbox Protection                    |           | 1,2                                     | 3~100                           | IP65                         |                               |        |        |        |        |        |
| Lubrication                                     |           | 1,2                                     | 3~100                           | Synthetic lubrication grease |                               |        |        |        |        |        |
| Mounting Position                               |           | 1,2                                     | 3~100                           | All directions               |                               |        |        |        |        |        |
| Running Noise <sup>(4)</sup>                    | dB(A)     | 1,2                                     | 3~100                           | ≤ 64                         | ≤ 66                          | ≤ 66   | ≤ 68   | ≤ 68   | ≤ 70   | ≤ 72   |
| Efficiency η                                    | %         | 1                                       | 3~10                            | ≥ 96%                        |                               |        |        |        |        |        |
|   |           | 2                                       | 12~100                          | ≥ 94%                        |                               |        |        |        |        |        |


(1) Ratio (i= N<sub>in</sub> / N<sub>out</sub>) .

(2) Backlash is measured at 2% of Nominal Output Torque T<sub>2N</sub>.

(3) Applied to the output shaft center at 100 rpm.

(4) The dB values are measured by gearbox with ratio 10 (1-stage) or ratio 100 (2-stage), no loading at 3,000 RPM or at the respective Nominal Input Speed by bigger model size.

By lower ratio and/or higher RPM, the noise level could be 3 to 5 dB higher.

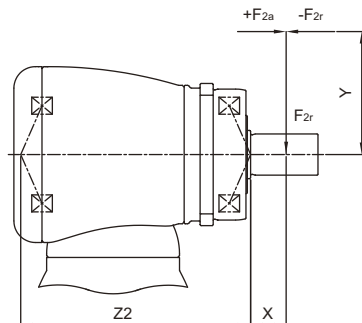

$$M_{2k} = \frac{F_{2a} \times Y + F_{2r} \times (X + Z_2)}{1000}$$

M<sub>2k</sub> : 【Nm】

F<sub>2a</sub> , F<sub>2r</sub> : 【N】

X , Y , Z<sub>2</sub> : 【mm】

| KF                   | KF 060 | KF 075 | KF 100 | KF 140 | KF 180 | KF 210 | KF 240 |
|----------------------|--------|--------|--------|--------|--------|--------|--------|
| Z <sub>2</sub> 【mm】  | 96.3   | 111.9  | 150.1  | 192    | 231.1  | 289.2  | 355.1  |
| M <sub>2k</sub> 【Nm】 | 310    | 530    | 1,090  | 2,340  | 5,400  | 9,700  | 15,200 |





# KF Gearbox Inertia

| Model No.                | KF 060             |         | KF 075  |         | KF 100  |         | KF 140  |         | KF 180  |         | KF 210  |         | KF 240  |         |
|--------------------------|--------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| $\varnothing^{(A)}$ (C3) | 1-stage            | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage | 1-stage | 2-stage |
| 8                        | 0.1                | 0.1     | -       |         | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       |
| 11                       | 0.17               | 0.16    | 0.18    | 0.17    | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       |
| 14                       | 0.21               | 0.2     | 0.5     | 0.21    | -       | 0.53    | -       | -       | -       | -       | -       | -       | -       | -       |
| 19                       | 0.62               | -       | 0.65    | 0.63    | 1.69    | 0.68    | -       | 1.83    | -       | -       | -       | -       | -       | -       |
| 24                       | -                  | -       | 4.49    | -       | 4.89    | 4.52    | 5.05    | 5.04    | -       | 5.63    | -       | -       | -       | -       |
| 28                       | -                  | -       | -       | -       | 6.14    | -       | 6.55    | 6.33    | -       | 7.18    | -       | -       | -       | -       |
| 32                       | kg.cm <sup>2</sup> | -       | -       | -       | 8.54    | -       | 9.47    | 8.73    | 10.18   | 10.1    | -       | 12.63   | -       | -       |
| 35                       | -                  | -       | -       | -       | 13.86   | -       | 14.91   | 14.04   | 15.21   | 15.54   | 15.68   | 17.75   | 23.46   | 20.8    |
| 38                       | -                  | -       | -       | -       | 18.87   | -       | 20.69   | 19.05   | 20.7    | 21.32   | 21.69   | 23.26   | 23.46   | 27.05   |
| 42                       | -                  | -       | -       | -       | -       | -       | 22.58   | -       | 22.83   | 23.2    | 23.59   | 25.4    | 25.28   | 28.95   |
| 48                       | -                  | -       | -       | -       | -       | -       | 55.45   | -       | 58.45   | 56.07   | 59.3    | 61.02   | 61.61   | 64.66   |
| 55                       | -                  | -       | -       | -       | -       | -       | -       | -       | -       | -       | 86.95   | -       | 89.67   | -       |
| 60                       | -                  | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | -       | 112.49  | -       |

(A)  $\varnothing$  = Input shaft diameter.

## Permitted Radial And Axial Loads<sup>(A)</sup>

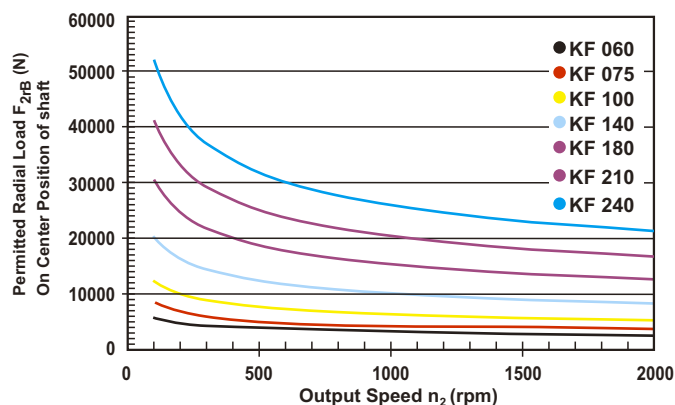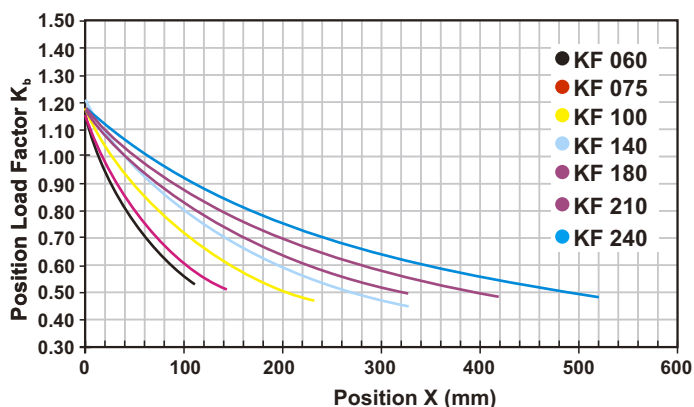


If radial force  $F_{2r}$  is not exerted on the center of the output shaft  $X < 1/2 L$  or  $X > 1/2 L$ , the permitted radial and axial loads can be calculated by the position load factor  $K_b$  on the above diagram.

Permitted radial load  $F_{2r}$  on center of output shaft.  $X = 1/2 L$  for various output speeds.

(A) Permitted loading values on the output shaft. Please refer to P. 16 glossary.


# KF-S1 / S2 / S3 Series Dimension

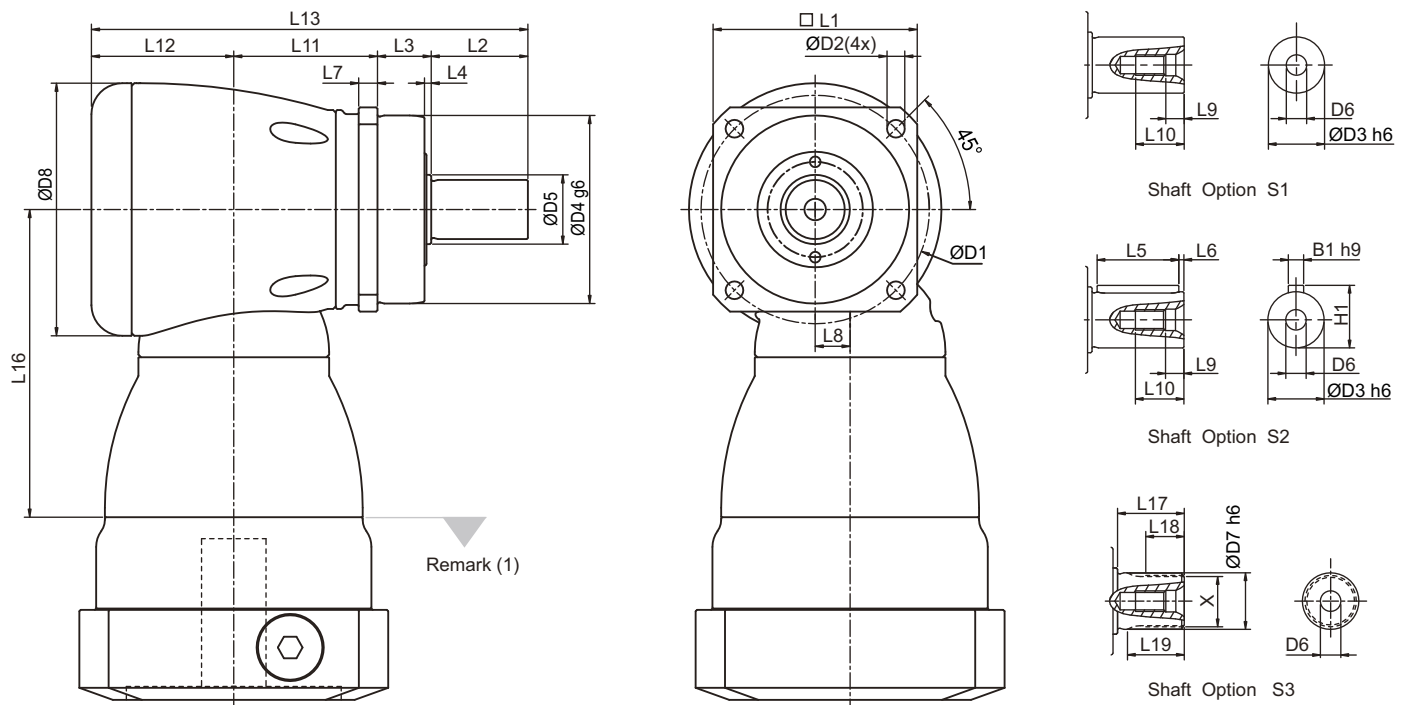

| Dimension | KF 060    | KF 075           | KF 100            | KF 140            | KF 180         | KF 210         | KF 240         |                |
|-----------|-----------|------------------|-------------------|-------------------|----------------|----------------|----------------|----------------|
|           | 1~2-stage | 1~2-stage        | 1~2-stage         | 1~2-stage         | 1~2-stage      | 1~2-stage      | 1~2-stage      |                |
| D1        | 68        | 85               | 120               | 165               | 215            | 250            | 290            |                |
| D2        | 5.5       | 6.6              | 9                 | 11                | 13.5           | 17             | 17             |                |
| D3        | h6        | 16               | 22                | 32                | 40             | 55             | 85             |                |
| D4        | g6        | 60               | 70                | 90                | 130            | 160            | 200            |                |
| D5        | 18.5      | 25.8             | 36.8              | 55.2              | 69.2           | 82.2           | 92.2           |                |
| D6        | M5X0.8P   | M8X1.25P         | M12X1.75P         | M16X2P            | M20X2.5P       | M20X2.5P       | M20X2.5P       |                |
| D7        | h6        | 16               | 22                | 32                | 40             | 55             | 85             |                |
| D8        | 73        | 94               | 116               | 163               | 210            | 255            | 300            |                |
| L1        | 62        | 76               | 101               | 141               | 182            | 215            | 245            |                |
| L2        | 28        | 36               | 58                | 82                | 82             | 105            | 130            |                |
| L3        | 20        | 20               | 30                | 30                | 30             | 38             | 40             |                |
| L4        | 2         | 2.5              | 3                 | 3                 | 3              | 3              | 3              |                |
| L5        | 25        | 32               | 50                | 63                | 70             | 90             | 125            |                |
| L6        | 2         | 2                | 4                 | 5                 | 6              | 7              | 3              |                |
| L7        | 6         | 7                | 10                | 12                | 15             | 17             | 20             |                |
| L8        | 10        | 13               | 17                | 25                | 31             | 36             | 43             |                |
| L9        | 4.8       | 7.2              | 10                | 12                | 15             | 15             | 15             |                |
| L10       | 12.5      | 19               | 28                | 36                | 42             | 42             | 42             |                |
| L11       | 43        | 53.5             | 67                | 90                | 119            | 141            | 176            |                |
| L12       | 44.5      | 53               | 68.3              | 89                | 115            | 131            | 165            |                |
| L13       | 135.5     | 162.5            | 223.3             | 291               | 346            | 415            | 511            |                |
| L16       | 94        | 114.5            | 129               | 173.5             | 228            | 265.5          | 294.5          |                |
| L17       | 26        | 26               | 26                | 40                | 41.5           | 52             | 60             |                |
| L18       | 15        | 15               | 15                | 20                | 21.5           | 28             | 36             |                |
| L19       | 21        | 22.5             | 23                | 33.5              | 33.5           | 45             | 53             |                |
| B1        | h9        | 5                | 6                 | 10                | 12             | 16             | 22             |                |
| H1        | 18        | 24.5             | 35                | 43                | 59             | 79.5           | 90             |                |
| X         | DIN 5480  | W16x0.8x30x18x6m | W22x1.25x30x16x6m | W32x1.25x30x24x6m | W40x2x30x18x6m | W55x2x30x26x6m | W70x2x30x34x6m | W80x2x30x38x6m |

(1) Dimensions are related to motor interface. Please contact APEX for details.

# KF-S4 Series Dimension

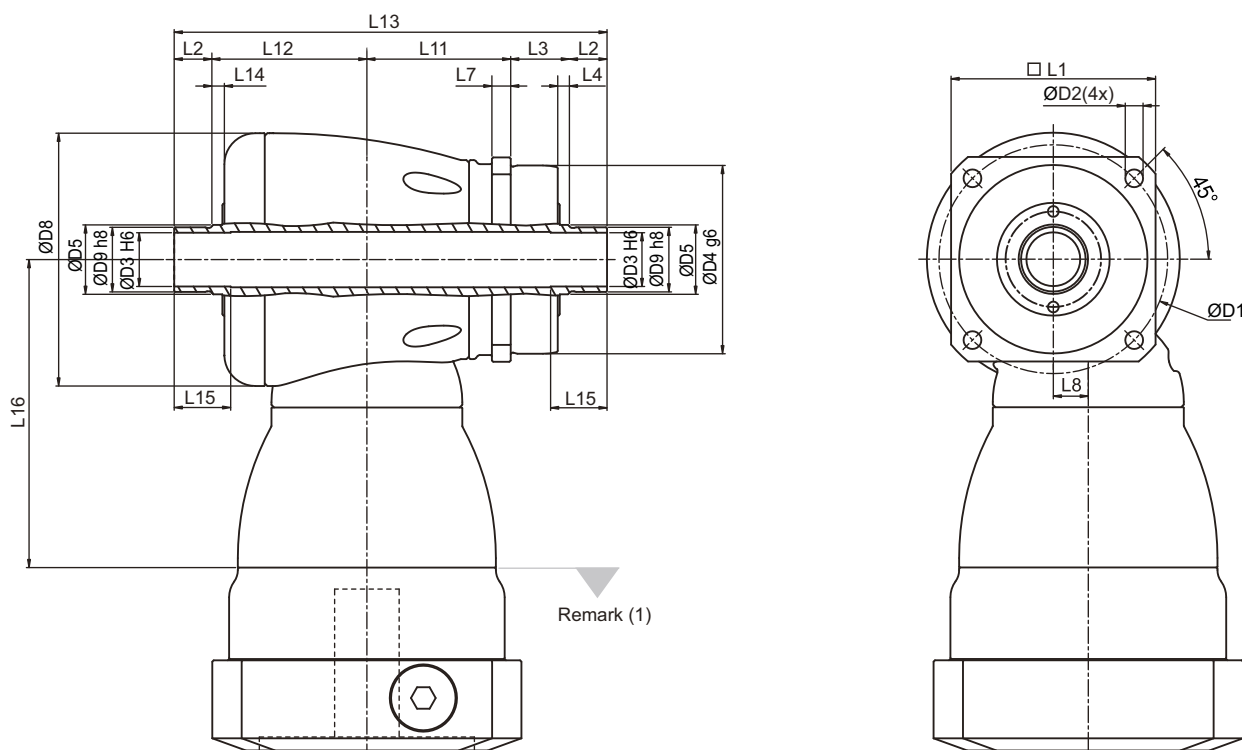

| Dimension | KF 060    | KF 075    | KF 100    | KF 140    | KF 180    |
|-----------|-----------|-----------|-----------|-----------|-----------|
|           | 1~2-stage | 1~2-stage | 1~2-stage | 1~2-stage | 1~2-stage |
| D1        | 68        | 85        | 120       | 165       | 215       |
| D2        | 5.5       | 6.6       | 9         | 11        | 13.5      |
| D3        | H6        | 15        | 20        | 30        | 40        |
| D4        | g6        | 60        | 70        | 90        | 130       |
| D5        |           | 18.5      | 25.8      | 36.8      | 55.2      |
| D8        |           | 73        | 94        | 116       | 163       |
| D9        | h8        | 18        | 24        | 36        | 50        |
| L1        |           | 62        | 76        | 101       | 141       |
| L2        |           | 12        | 14        | 18        | 22        |
| L3        |           | 22        | 21.8      | 32        | 33        |
| L4        |           | 4         | 4.3       | 5         | 6         |
| L7        |           | 6         | 7         | 10        | 12        |
| L8        |           | 10        | 13        | 17        | 25        |
| L11       |           | 43        | 53.5      | 67        | 90        |
| L12       |           | 48.5      | 57.7      | 73.3      | 95        |
| L13       |           | 137.5     | 161       | 208.3     | 262       |
| L14       |           | 4         | 4.7       | 5         | 6         |
| L15       |           | 19        | 21        | 25        | 30        |
| L16       |           | 94        | 114.5     | 129       | 173.5     |

(1) Dimensions are related to motor interface. Please contact APEX for details.

# KFGearbox Performance (Spiral Bevel)


| Model No.                                | Stages    | Ratio <sup>(1)</sup> | KF 060                       | KF 075    | KF 100    | KF 140    | KF 180    | KF 210    | KF 240    |
|--|-----------|----------------------|------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Nominal Output Torque $T_{2N}$           | Nm        | 1                    | 25                           | 45        | 78        | 150       | 360       | 585       | 1,300     |
|  |           | 2                    | 24                           | 42        | 68        | 150       | 330       | 544       | 1,220     |
| Emergency Stop Torque $T_{2NOT}$         | Nm        | 1                    | 2 times $T_{2N}$             |           |           |           |           |           |           |
| Max. Acceleration Torque $T_{2B}$        | Nm        | 1                    | 1,5 times $T_{2N}$           |           |           |           |           |           |           |
| No Load Running Torque <sup>(4)</sup>    | Nm        | 1                    | 0.3                          | 0.3       | 1.5       | 1.7       | 5.5       | 9         | 20        |
| Backlash <sup>(2)</sup>                  | arcmin    | 1                    | $\leq 3$                     | $\leq 3$  | $\leq 3$  | $\leq 3$  | $\leq 3$  | $\leq 3$  | $\leq 3$  |
| Torsional Rigidity                       | Nm/arcmin | 1                    | 0.8                          | 3.5       | 9         | 20.5      | 44        | 80        | 168       |
| Nominal Input Speed $n_{1N}$             | rpm       | 1                    | 6,500                        | 4,500     | 3,500     | 2,000     | 1,500     | 1,200     | 1,000     |
| Max. Input Speed $n_{1B}$                | rpm       | 1                    | 7,500                        | 6,500     | 5,500     | 4,500     | 3,500     | 3,000     | 2,200     |
| Max. Radial Load $F_{2r}$ <sup>(3)</sup> | N         | 1                    | 5,400                        | 7,700     | 11,100    | 18,100    | 29,100    | 36,400    | 46,900    |
| Max. Axial Load $F_{2a}$ <sup>(3)</sup>  | N         | 1                    | 2,700                        | 3,850     | 5,550     | 9,050     | 14,550    | 18,200    | 23,450    |
| Operating Temp                           | °C        | 1                    | 0° C~ +90° C                 |           |           |           |           |           |           |
| Degree of Gearbox Protection             |           | 1                    | IP65                         |           |           |           |           |           |           |
| Lubrication                              |           | 1                    | Synthetic lubrication grease |           |           |           |           |           |           |
| Mounting Position                        |           | 1                    | All directions               |           |           |           |           |           |           |
| Running Noise <sup>(4)</sup>             | dB(A)     | 1                    | $\leq 68$                    | $\leq 70$ | $\leq 74$ | $\leq 76$ | $\leq 77$ | $\leq 78$ | $\leq 80$ |
| Efficiency $\eta$                        | %         | 1                    | $\geq 97\%$                  |           |           |           |           |           |           |

(1) Ratio ( $i = N_{in} / N_{out}$ ).

(2) Backlash is measured at 2% of Nominal Output Torque  $T_{2N}$ .

(3) Applied to the output shaft center at 100 rpm.

(4) The dB values are measured by gearbox with ratio 2 (1-stage), no loading at 3,000 RPM or at the respective Nominal Input Speed by bigger model size.  
By lower ratio and/or higher RPM, the noise level could be 3 to 5 dB higher.

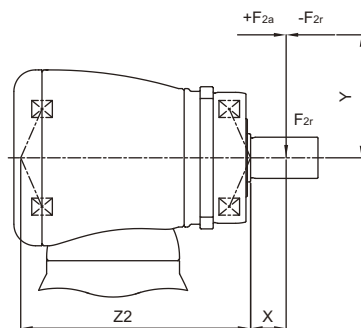

$$M_{2k} = \frac{F_{2a} \times Y + F_{2r} \times (X + Z_2)}{1000}$$

$M_{2k}$  : 【Nm】

$F_{2a}$ ,  $F_{2r}$  : 【N】

$X$ ,  $Y$ ,  $Z_2$  : 【mm】



| KF 【Spiral Bevel】 | KF 060 | KF 075 | KF 100 | KF 140 | KF 180 | KF 210 | KF 240 |
|-------------------|--------|--------|--------|--------|--------|--------|--------|
| <b>Z2 【mm】</b>    | 104.4  | 119.3  | 144.3  | 178    | 251.9  | 253.9  | 330.8  |
| <b>M2k 【Nm】</b>   | 390    | 630    | 1,100  | 2,230  | 5,020  | 6,430  | 10,810 |

# KF Gearbox Inertia (Spiral Bevel)

| Model No.                | KF 060  | KF 075  | KF 100  | KF 140  | KF 180  | KF 210  | KF 240  |
|--------------------------|---------|---------|---------|---------|---------|---------|---------|
| $\varnothing^{(A)}$ (C3) | 1-stage | 1-stage | 1-stage | 1-stage | 1-stage | 1-stage | 1-stage |
| 8                        | 0.1     | -       | -       | -       | -       | -       | -       |
| 11                       | 0.17    | 0.18    | -       | -       | -       | -       | -       |
| 14                       | 0.21    | 0.5     | -       | -       | -       | -       | -       |
| 19                       | 0.62    | 0.65    | 1.69    | -       | -       | -       | -       |
| 24                       | -       | 4.49    | 4.89    | 5.05    | -       | -       | -       |
| 28                       | -       | -       | 6.14    | 6.55    | -       | -       | -       |
| 32                       | -       | -       | 8.54    | 9.47    | 10.18   | -       | -       |
| 35                       | -       | -       | 13.86   | 14.91   | 15.21   | 15.68   | 23.46   |
| 38                       | -       | -       | 18.87   | 20.69   | 20.7    | 21.69   | 23.46   |
| 42                       | -       | -       | -       | 22.58   | 22.83   | 23.59   | 25.28   |
| 48                       | -       | -       | -       | 55.45   | 58.45   | 59.3    | 61.61   |
| 55                       | -       | -       | -       | -       | -       | 86.95   | 89.67   |
| 60                       | -       | -       | -       | -       | -       | -       | 112.49  |

(A)  $\varnothing$  = Input shaft diameter.

## Permitted Radial And Axial Loads<sup>(A)</sup>

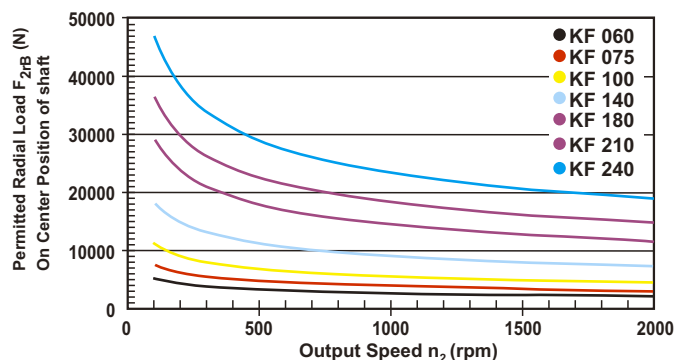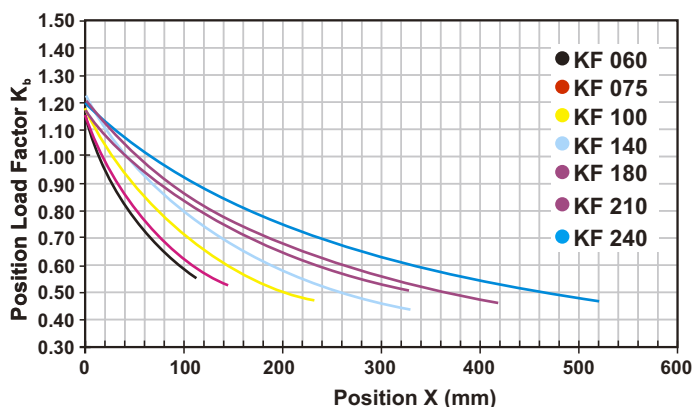


If radial force  $F_{2r}$  is not exerted on the center of the output shaft  $X < 1/2 L$  or  $X > 1/2 L$ , the permitted radial and axial loads can be calculated by the position load factor  $K_b$  on the above diagram.

Permitted radial load  $F_{2r}$  on center of output shaft.  $X = 1/2 L$  for various output speeds.

(A) Permitted loading values on the output shaft. Please refer to P. 16 glossary.


# KF Dimension (Spiral Bevel)

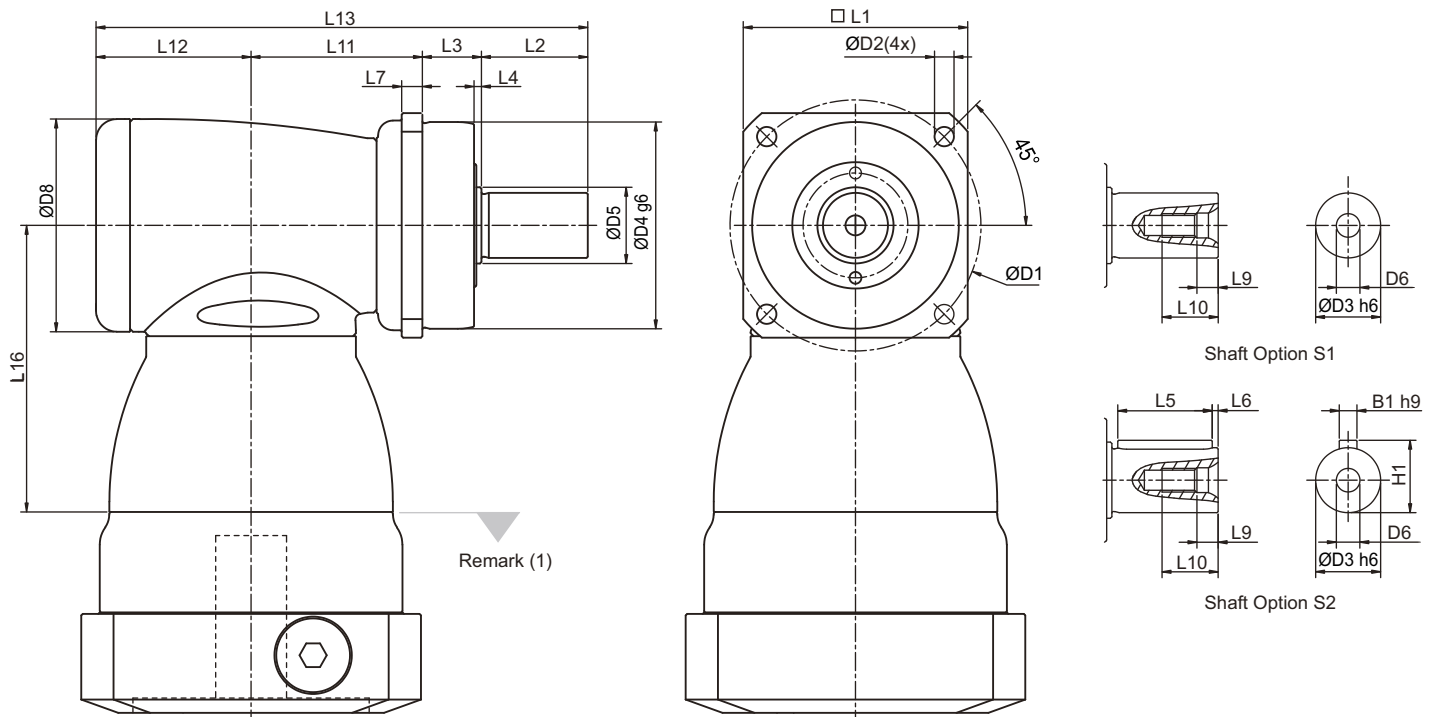

| Dimension | KF 060  | KF 075   | KF 100    | KF 140  | KF 180   | KF 210   | KF 240   |
|-----------|---------|----------|-----------|---------|----------|----------|----------|
|           | 1-stage | 1-stage  | 1-stage   | 1-stage | 1-stage  | 1-stage  | 1-stage  |
| D1        | 68      | 85       | 120       | 165     | 215      | 250      | 290      |
| D2        | 5.5     | 6.6      | 9         | 11      | 13.5     | 17       | 17       |
| D3        | h6 16   | 22       | 32        | 40      | 55       | 75       | 85       |
| D4        | g6 60   | 70       | 90        | 130     | 160      | 180      | 200      |
| D5        | 18.5    | 25.8     | 36.8      | 55.2    | 69.2     | 82.2     | 92.2     |
| D6        | M5X0.8P | M8X1.25P | M12X1.75P | M16X2P  | M20X2.5P | M20X2.5P | M20X2.5P |
| D8        | 64      | 72       | 92        | 116     | 156      | 195      | 240      |
| L1        | 62      | 76       | 101       | 141     | 182      | 215      | 245      |
| L2        | 28      | 36       | 58        | 82      | 82       | 105      | 130      |
| L3        | 20      | 20       | 30        | 30      | 30       | 38       | 40       |
| L4        | 2       | 2.5      | 3         | 3       | 3        | 3        | 3        |
| L5        | 25      | 32       | 50        | 63      | 70       | 90       | 125      |
| L6        | 2       | 2        | 4         | 5       | 6        | 7        | 3        |
| L7        | 6       | 7        | 10        | 12      | 15       | 17       | 20       |
| L9        | 4.8     | 7.2      | 10        | 12      | 15       | 15       | 15       |
| L10       | 12.5    | 19       | 28        | 36      | 42       | 42       | 42       |
| L11       | 50      | 58       | 67.5      | 88      | 127      | 131.5    | 169      |
| L12       | 46.5    | 52.5     | 61.5      | 76      | 97.5     | 105.5    | 141      |
| L13       | 144.5   | 166.5    | 217       | 276     | 336.5    | 380      | 480      |
| L16       | 81.5    | 97       | 113.5     | 147.5   | 196.5    | 229      | 260      |
| B1        | h9 5    | 6        | 10        | 12      | 16       | 20       | 22       |
| H1        | 18      | 24.5     | 35        | 43      | 59       | 79.5     | 90       |

(1) Dimensions are related to motor interface. Please contact APEX for details.

# SHRINK DISC POWER LOCK

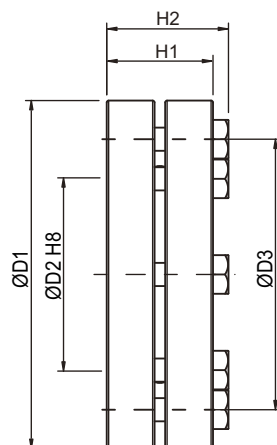


SHRINK DISC POWER LOCK

| Model No.     | Dimension    | D1  | D2 | D3 | H1   | H2   | Screw <sup>(1)</sup> | $T_A$ <sup>(2)</sup> | J                     | Order code |
|---------------|--------------|-----|----|----|------|------|----------------------|----------------------|-----------------------|------------|
|               |              |     |    |    |      |      | No. x Type           | (Nm)                 | (kg.cm <sup>2</sup> ) |            |
| <b>KF 060</b> | SSD-d18xdw15 | 44  | 18 | 30 | 15   | 18.5 | 5 x M5               | 4                    | 0.4                   | SSD-18     |
| <b>KF 075</b> | SSD-d24xdw20 | 50  | 24 | 36 | 19.5 | 23   | 6 x M5               | 4                    | 0.8                   | SSD-24     |
| <b>KF 100</b> | SSD-d36xdw30 | 72  | 36 | 52 | 23.5 | 27.5 | 5 x M6               | 12                   | 3.9                   | SSD-36     |
| <b>KF 140</b> | SSD-d50xdw40 | 90  | 50 | 70 | 27.5 | 31.5 | 8 x M6               | 12                   | 11.2                  | SSD-50     |
| <b>KF 180</b> | SSD-d68xdw55 | 115 | 68 | 86 | 30.5 | 34.5 | 10 x M6              | 12                   | 30.9                  | SSD-68     |

(1) 10.9 Class, DIN 931

(2) Tightening Torque

# Selection of the optimum gearbox

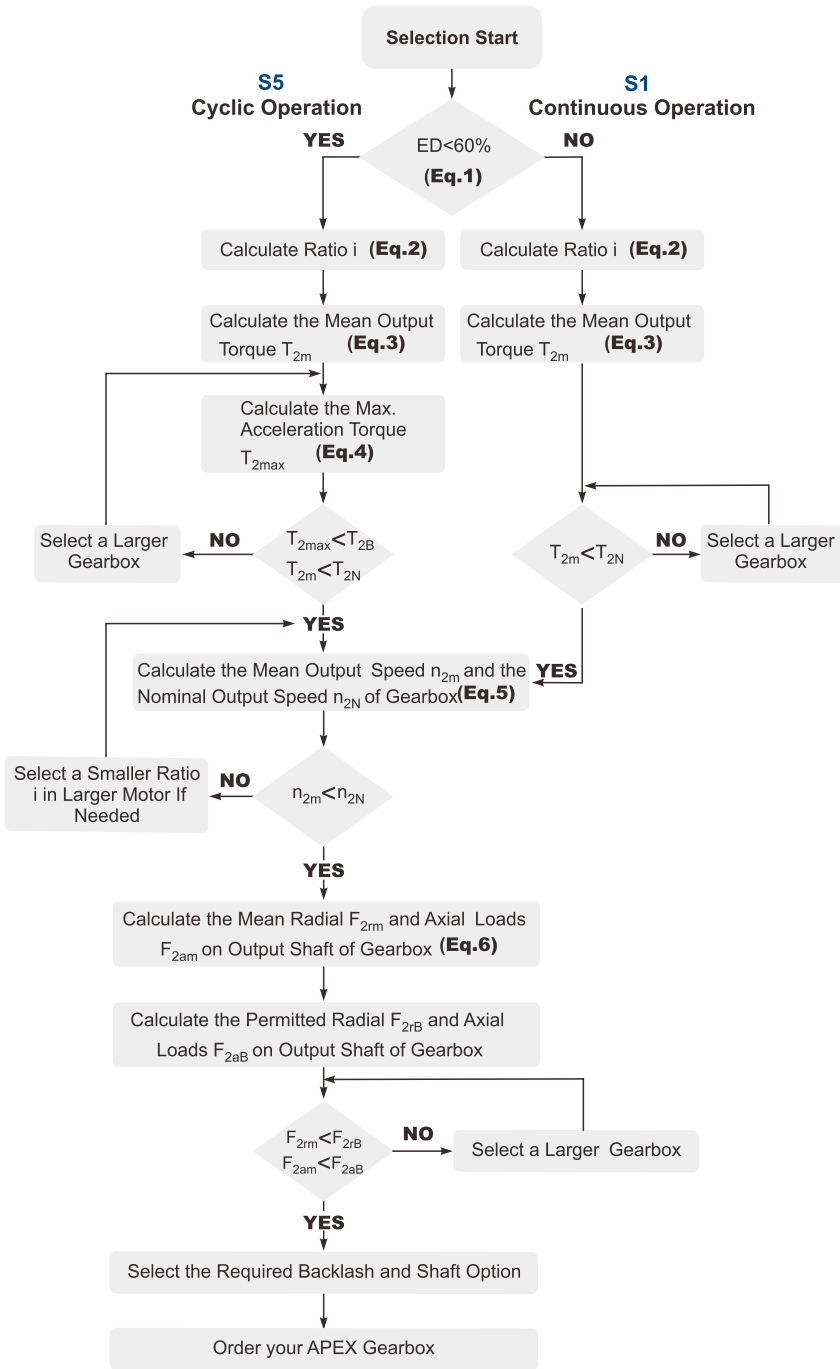

**Recommended (for S5 Cycle Operation)**


The general design is given for

$$\frac{J_L}{i^2} \leq 4 \times J_m$$

The optimal design is given for

$$\frac{J_L}{i^2} \cong J_m$$

$J_L$  Load Inertia  
 $J_m$  Motor Inertia

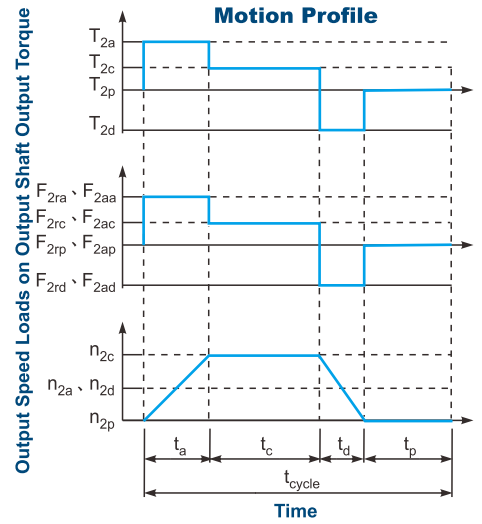

$$1. ED = \frac{t_a + t_c + t_d}{t_{cycle}} \times 100\% .$$

Index : a. Acceleration, c. Constant,  
 d. Deceleration, p. Pause (Eq.1)

$$2. i \cong \frac{n_m}{n_{work}}$$

$n_m$  Output Speed of the Motor  
 $n_{work}$  Working Speed (Eq.2)

$$3. T_{2m} = \sqrt[3]{\frac{n_{2a} \times t_a \times T_{2a}^3 + n_{2c} \times t_c \times T_{2c}^3 + n_{2d} \times t_d \times T_{2d}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

(Eq.3)

$$4. T_{2max} = T_{mB} \times i \times K_s \times \eta$$

where  $K_s$  is

| $K_s$ | No. of Cycles / hr |
|-------|--------------------|
| 1.0   | 0 ~ 1,000          |
| 1.1   | 1,000 ~ 1,500      |
| 1.3   | 1,500 ~ 2,000      |
| 1.6   | 2,000 ~ 3,000      |
| 1.8   | 3,000 ~ 5,000      |

$T_{mB}$  Max. Output Torque of the Motor

$$\eta \text{ Efficiency of the Gearbox (Eq.4)}$$

$$5. n_{2a} = n_{2d} = \frac{1}{2} \times n_{2c}$$

$$n_{2m} = \frac{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}{t_a + t_c + t_d}$$




$$n_{2N} = \frac{n_{1N}}{i} \text{ (Eq.5)}$$

$$6. F_{2rm} = \sqrt[3]{\frac{n_{2a} \times t_a \times F_{2ra}^3 + n_{2c} \times t_c \times F_{2rc}^3 + n_{2d} \times t_d \times F_{2rd}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

$$F_{2am} = \sqrt[3]{\frac{n_{2a} \times t_a \times F_{2aa}^3 + n_{2c} \times t_c \times F_{2ac}^3 + n_{2d} \times t_d \times F_{2ad}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}} \text{ (Eq.6)}$$



# Glossary
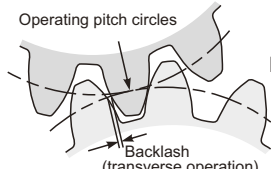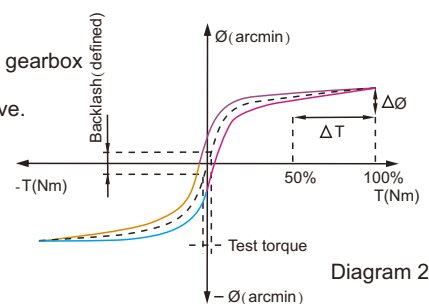
|                                   |                    |  |
|-----------------------------------|--------------------|--|
| Emergency Stop Torque $T_{2NOT}$  | Nm                 | The Emergency Stop Torque is the maximum permitted torque at the output of gearbox. This may happen only occasionally and may not exceed 1,000 times during the whole service life.  |
| Max. Acceleration Torque $T_{2B}$ | Nm                 | Under the Cyclic Operation (S5), the Max. Acceleration Torque is the maximum torque which can be transmitted only briefly to the output of gearbox up to 1,000 cycles/hr.  |
| No Load Running Torque            | Nm                 | The No Load Running Torque is the min. torque to overcome the internal friction of a gearbox without loading*.   |
| Nominal Input Speed $n_{1N}$      | rpm                | The Nominal Input Speed is the permitted input speed of gearbox by the Continuous Operation (S1) while the housing temperature does not exceed 90°C. This value is measured at environment temperature 25°C.   |
| Max. Input Speed $n_{1B}$         | rpm                | The Max. Input Speed is the max. permitted input speed of gearbox by the Cyclic operation (S5). This value is measured at environment temperature 25°C and serves as the absolute limit of the gearbox.  |
| Backlash                          | arcmin             | <p>The Backlash is the maximum angular measurement between two teeth of gears when the transverse operation occurs (refer to Diagram 1). The arcmin is the measurement unit for the backlash. One arcmin equals 1/60 degree, symbolized as 1'.</p>  <p style="text-align: right;">Diagram 1</p>   |
| Torsional Rigidity                | Nm/arcmin          | <p>Torsional Rigidity is the quotient (<math>\Delta T / \Delta \theta</math>) between the applied torque and resulting torsion angle. This value indicates how much torque is needed on the gearbox to rotate the output shaft for 1 arcmin. The Torsional Rigidity can be determined by Hysteresis Curve.</p> <p><b>Hysteresis Curve</b><br/>When the input shaft is locked, increase torque at the output slowly up to <math>T_{2B}</math> in both directions and then release the torque gradually. According to the measured torque and torsion angle, a closed curve will be acquired as in the Diagram 2.</p>  <p style="text-align: right;">Diagram 2</p> |
| Radial Load And Axial Load        | N                  | <p>The permitted radial and axial loads on output shaft of the gearbox depend on the design of the gearbox supporting bearings.</p> <p>For more information, please refer to APEX website.</p>  <p style="text-align: right;"><math>F_{2r}</math> Radial Load<br/><math>F_{2a}</math> Axial Load</p>  |
| Efficiency $\eta$                 | %                  | The transmission efficiency of the gears inside a gearbox (without friction).  |
| Operating Temperature             | °C                 | The Operating Temperature indicates the temperature of gearbox housing.  |
| Degree of Protection              |                    | IP code stands for International Protection standard. The IP65 as example: the first IP number stands for protection degree against dust; the second IP number stands for protection against liquid.   |
| Lubrication                       |                    | APEX uses synthetic lubrication grease. Alternate greases are available, please contact APEX.  |
| Running Noise                     | dB(A)              | The Running Noise is measured depends on gearbox size, the ratio and the speed*. Higher speed usually induces higher noise level, while higher ratio induces lower noise level.  |
| Moment of Inertia $J_1$           | kg.cm <sup>2</sup> | The Moment of Inertia $J_1$ is a measurement of the effort applied to an object to maintain its momentary condition at rest or rotating.   |
| Breakaway Torque                  | Nm                 | The Breakaway Torque is the minimum torque to start the rotation from the input side of gearbox. A smaller size or a higher ratio gearbox requests less Breakaway Torque.  |
| Back Driving Torque               | Nm                 | The Back Driving Torque is the minimum torque to start the rotation from the output side of gearbox. A larger size or a higher ratio gearbox requires greater Back Driving Torque.   |

\* This value is measured at environment temperature 25°C and the input speed 3,000 rpm. If the Nominal Input Speed  $n_{1N}$  of gearbox is lower than 3,000 rpm, this value is measured by that specific Nominal Input Speed.

# Note

# Note



**APEX TAIWAN NORTH  
ANDTEK AUTOMATION CO.,LTD**  
TEL +886-02-82262655  
13F-5, NO.2, Jian 8th Rd., Jhonghe Dist., New  
Taipei City 235, TAIWAN  
[sales@andtek.com.tw](mailto:sales@andtek.com.tw)  
[www.apexdyan.com](http://www.apexdyan.com)



**APEX TAIWAN CENTRAL  
ANDTEK AUTOMATION CO.,LTD**  
TEL +886-04-23594286  
9F-6, NO.925, Sec.4, Taiwan Blvd., Xitun Dist.  
Taichung City 407, TAIWAN  
[sales@andtek.com.tw](mailto:sales@andtek.com.tw)  
[www.apexdyan.com](http://www.apexdyan.com)



**APEX TAIWAN SOUTH  
MEN JENN ELECTRIC CO., LTD.**  
TEL +886-06-2337332\*6  
NO.774, Zhonghua Rd., Yongkang Dist., Tainan  
City 710, TAIWAN  
[sales@ms24.hinet.net](mailto:sales@ms24.hinet.net)  
[www.apexdyan.com](http://www.apexdyan.com)



**APEX TAIWAN INC. SHANGHAI**  
TEL +86-21-69220577  
NO.128 ZHUWING Road QINGPU Industry Area,  
Shanghai, CHINA  
[sales@apexdyna.cn](mailto:sales@apexdyna.cn)  
[www.apexdyan.cn](http://www.apexdyan.cn)



**APEX DYNAMICS SHENZHEN, LTD.**  
TEL +86-755-84516325  
NO. 1102A of D area, CFG mansion, Bao Yuan  
Road, Bao' an District, Shenzhen, CHINA.  
[sales@szapexdyna.com](mailto:sales@szapexdyna.com)  
[www.szapexdyna.com](http://www.szapexdyna.com)



**APEX DYNAMICS BEIJING, LTD.**  
TEL +86-10-69570691  
NO. 1, Yao Ping Road, Song Zhuang Town, Tongzhou  
District, Beijing, CHINA.  
[bjapexdyna@163.com](mailto:bjapexdyna@163.com)  
[www.bjapex.cn](http://www.bjapex.cn)



**CHONGQING APEX DYNAMICS CO., LTD.**  
TEL +86-23-67686860  
406, Building 5, NO. 68, Jinyu Avenue, Beibu New  
Area, Chongqing, CHINA  
[sales@cqapexdyna.com](mailto:sales@cqapexdyna.com)  
[www.apexdyna.com](http://www.apexdyna.com)



**APEX (XIAMEN) DYNAMICS TECHNOLOGY CO., LTD.**  
TEL +86-0592-720-5279  
Unit B-3, 1F., NO. 129, Jingquan Road, Jimei District,  
Xiamen, Fujian, CHINA  
[sales@xmapexdyan.com](mailto:sales@xmapexdyan.com)  
[www.xmapexdyna.com](http://www.xmapexdyna.com)



**APEX DYNAMICS USA, INC.**  
TEL +1-631-2449040  
885 Marconi Avenue Ronkonkoma, NY 11779  
U.S.A.  
[sales@apexdynamicsusa.com](mailto:sales@apexdynamicsusa.com)  
[www.apexdynamicsusa.com](http://www.apexdynamicsusa.com)



**APEX DYNAMICS KOREA INC**  
TEL +82-31-8179992  
7-5, Aenigol-gil, Ilsandong-gu, Goyang-si, Gyeonggi-do,  
Republic of Korea 10301  
[sales@apexdynakorea.co.kr](mailto:sales@apexdynakorea.co.kr)  
[www.apexdynakorea.co.kr](http://www.apexdynakorea.co.kr)



**APEX DYNAMICS JAPAN**  
TEL +88-092-4511202  
1-3-46, Hamnichibasi, Hakata-ku, Fukuoka,  
812-0897, JAPAN  
[sales@apexdyna.jp](mailto:sales@apexdyna.jp)  
[www.apexdyna.jp](http://www.apexdyna.jp)



**APEX DYNAMICS SINGAPORE PTE LTD**  
TEL +34-93-6562228  
3 South Buona Vista Road, #05-15 & #06-15.  
SINGAPORE 118136  
[sales@apexdyna.com.sg](mailto:sales@apexdyna.com.sg)  
[www.apexdyna.com.sg](http://www.apexdyna.com.sg)



**APEX DYNAMICS (THAILAND) CO., LTD.**  
TEL +66-2-326623  
87 Soi Ladkrabang 30, Ladkrabang, Ladkrabang,  
Bangkok 10520, Thailand  
[Apexthai2010@gmail.com](mailto:Apexthai2010@gmail.com)  
[www.apexdyna.co.th](http://www.apexdyna.co.th)



**APEX DYNAMICS BV**  
TEL +31-492-509995  
Churchillaan 101 5705 BK Helmond, NETHERLANDS  
[sales@apexdyna.nl](mailto:sales@apexdyna.nl)  
[www.apexdyna.be](http://www.apexdyna.be)



**APEX DYNAMICS  
POLSKA SP. Z O.O.**  
TEL +48-12-6304728  
Ul. Krakowska 50, 32-083 Balice, Poland  
[sales@apexdyna.pl](mailto:sales@apexdyna.pl)  
[www.apexdyna.pl](http://www.apexdyna.pl)



**APEX DYNAMICS SPAIN, S.L.**  
TEL +34-93-6562290  
Poligono Industrial Moli dels Freres, Calle C nº  
12,08620-Sant Vicenç dels Horts, Barcelona, SPAIN  
[apexdyna@apexdyna.es](mailto:apexdyna@apexdyna.es)  
[www.apexdyna.es](http://www.apexdyna.es)



**Big Diamond Trading Company LLC**  
TEL +968-94268885  
2nd floor, Regus, Tamimah building, Al  
Wattayah, Muscat, Oman  
[ar.gorji@diamondtradings.com](mailto:ar.gorji@diamondtradings.com)



**APEKS DINAMIK REDUKTOR DISLI SAN TIC AS**  
TEL +90-232-4589960  
10053 SOKAK NO: 9 A.O.S.B. CIGLI - IZMIR - TURKEY  
[sales@apexdyna.com.tr](mailto:sales@apexdyna.com.tr)  
[www.apexdyna.com.tr](http://www.apexdyna.com.tr)



**APEX DYNAMICS AUSTRALIA PTY LTD.**  
TEL +613-95-852739  
36 Taunton Drive, Cheltenham, Victoria 3192  
AUSTRALIA  
[sales@apexdyna.com.au](mailto:sales@apexdyna.com.au)  
[www.apexdyna.com.au](http://www.apexdyna.com.au)



**APEX DYNAMICS (I) JV**  
TEL +91-9607927142  
Shop No. 02, S. No. 100/5, Pune-Satara Highway,  
Ambegaon Khurd, Pune-411046 Maharashtra, India  
[sales@apexdyna.co.in](mailto:sales@apexdyna.co.in)  
[www.apexdyna.co.in](http://www.apexdyna.co.in)



**APEX DYNAMICS FRANCE SAS**  
TEL +33-160-135097  
11 - Burospace - 91570 - Bièvres, France  
[info@apexdyna.fr](mailto:info@apexdyna.fr)  
[www.apexdyna.fr](http://www.apexdyna.fr)



**APEX DYNAMICS SWEDEN AB**  
TEL +46-75-2424444  
Fredrikbergsgatan 2 SE-573 92 Tranås, SWEDEN  
[sales@apexdyna.se](mailto:sales@apexdyna.se)  
[www.apexdyna.se](http://www.apexdyna.se)



**PT.APEX DYNAMICS INDONESIA**  
TEL +62 21 2928 3681  
Rukan Aralia Blok HY43 no.11, Harapan Indah II,  
Bekasi - Jawa Barat, INDONESIA 17214  
[sales@apexdyna.co.id](mailto:sales@apexdyna.co.id)  
[www.apexdyna.co.id](http://www.apexdyna.co.id)



**APEX DYNAMICS GERMANY GMBH**  
TEL +49-7171 798069-0  
Marie-Curie-Straße 25 D-73529 Schwäbisch Gmünd  
[werner.langer@apexdynamics.de](mailto:werner.langer@apexdynamics.de)  
[www.apexdynamics.de](http://www.apexdynamics.de)



**APEX DYNAMICS CZECH S.R.O.**  
TEL +420-577-663877  
tř. Tomáše Bati 1851 765 02 Otrokovice Česká  
REPUBLIKA  
[info@apexdynaczech.cz](mailto:info@apexdynaczech.cz)  
[www.apexdynaczech.cz](http://www.apexdynaczech.cz)



**APEX DYNAMICS РОССИЯ**  
TEL +7-495-2255452  
TEL +7-495-6462422  
г.Москва, ул. Южнопортовая, дом 7, строение  
"С", 3-й этаж  
[info@apexdynarussia.ru](mailto:info@apexdynarussia.ru)  
[www.apexdynarussia.ru](http://www.apexdynarussia.ru)



**APEX DYNAMICS MIDLANDS LTD**  
TEL +44-0121-737-1170  
Heath House, Cheadle Rd, Uttoxeter,  
ST14 7BY, UK  
[mikeg@apexdynauk.com](mailto:mikeg@apexdynauk.com)  
[www.apexdynauk.com](http://www.apexdynauk.com)



**APEX DYNAMICS SWITZERLAND AG**  
TEL +41-55-4517020  
Obergasse 40, CH-8854 Galgenen, Switzerland  
[info@apexdyna.ch](mailto:info@apexdyna.ch)  
[www.apexdyna.ch](http://www.apexdyna.ch)



**APEX DYNAMICS MOTION (M) SDN BHDTEL**  
TEL +60 7237 1055  
Block A1-2, #35-03, Mercu 1 Jalan Tanjung Puteri 1,  
R & F Tanjung Puteri, Johor Bahru 80300, Johor.  
[sales@apexdyna.com.sg](mailto:sales@apexdyna.com.sg)  
[www.apexdyna.com.sg](http://www.apexdyna.com.sg)



**APEX DYNAMICS BRAZIL**  
TEL +55-47-30298700  
Rua Senador Petrônio Portela, 47-Bloco 5, Zona  
Industrial Norte-CEP 89218-575-Joinville (SC)  
[luciano@neoyama.com.br](mailto:luciano@neoyama.com.br)  
[adriano.tuarte@neoyama.com.br](mailto:adriano.tuarte@neoyama.com.br)  
[www.neoyama.com.br](http://www.neoyama.com.br)



**APEX DYNAMICS ITALY SRL**  
TEL +39 02 36634521  
VIA E. DE AMICIS, 2-20091 BRESSO (MI)  
[info@apexdynamics.it](mailto:info@apexdynamics.it)  
[www.apexdynamics.it](http://www.apexdynamics.it)



**APEX DYNAMICS AUSTRIA GmbH**  
TEL +43 720788416  
Dr. Hans-Lechner-Strasse 6,  
5071 Wals-Siezenheim  
[info@apexdynamics.at](mailto:info@apexdynamics.at)  
[www.apexdynamics.at](http://www.apexdynamics.at)



**UAB "APEKSO DINAMIKA"**  
TEL +370 52078165  
Medaus g. 28A,  
Medininku k., Vilnius r. Sav.  
LT-13192  
[info@apexdyna.lt](mailto:info@apexdyna.lt)  
[www.apexdyna.lt](http://www.apexdyna.lt)



**APEX DYNAMICS DENMARK**  
TEL +45 73121260  
Grundtvigs Allé 165, 6400  
Sønderborg, Denmark  
[sales@apexdyna.dk](mailto:sales@apexdyna.dk)  
[www.apexdyna.dk](http://www.apexdyna.dk)



**APEX DYNAMICS ISRAEL**  
TEL +972-3-6470471  
17 Hamefalsim St., Kiryat Arye,  
Petach-Tikva 4951447  
[Sales@apexdynamics.co.il](mailto:Sales@apexdynamics.co.il)  
[www.apexdynamics.co.il](http://www.apexdynamics.co.il)



**APEX DYNAMICS SLOVAKIA S.R.O.**  
TEL +421919400476  
Trenčianska cesta 887/52, 957 01  
Bánovce nad Bebravou, Slovak republic  
[office@apexdyna.sk](mailto:office@apexdyna.sk)  
[www.apexdyna.sk](http://www.apexdyna.sk)



## APEX DYNAMICS, INC.

No10. Keyuan 3rd RD.Situn District, Taichung City 40763, Taiwan (R.O.C)

Tel:886-4-24650219 | Fax:886-4-24650118

[sales@apexdyna.com](mailto:sales@apexdyna.com) | <http://www.apexdyna.com>

**APEX-2022-11-K SERIES-1.0-TWN**

Printed in Taiwan

