#### **Battery Charger**

# TBC2 series

and the statest se

3





0

Optional

#### **Product Segments**

### Care Motion


#### **General Features**


Options Charging dock Designed specifically to recharge the control box - TC12 series The TBC2 must be ordered separately when ordering TC12

# TBC2 series

#### Drawing


Dimensions with EU Plug (mm)








Dimensions with USA Plug (mm)









Dimensions with AUS Plug (mm)










# TBC2 series

#### Drawing


Dimensions with UK Plug (mm)









Dimensions with JPN Plug (mm)









## TBC2 Ordering Key

### TBC2



Version: 20201112-F


Input Voltage	4 = 100~240V AC		
AC Plug	1 = EU	3 = AU	5 = JP
<u>See page 2</u>	2 = US	4 = UK	
Color	1 = Black	2 = Pantone 428C	
Charging Cradle See page 5	0 = Without	1 = With	2 = With. With LED power indicator
Cable Length & Plug (mm)	1 = Straight, 2000; DC plug, 180°		3 = Straight, 2000; DC plug, 90°
<u>See page 5</u>	2 = Straight, 4000; DC plug, 180 $^{\circ}$		4 = Straight, 4000; DC plug, 90°
IP Rating	1 = Without		

4


### **TBC2** Ordering Key Appendix



#### Cable Length & Plug

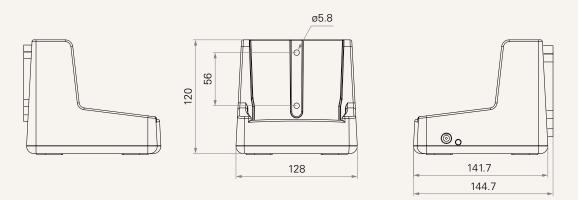

#### Charging Cradle (mm)



#### **Terms of Use**

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.