

TMH12

series



Product Segments


- **Care Motion**

General Features

Number of motors	1~5
Max. available buttons	12
Color	White, grey
IP rating	IP66W
Options	Back light, hook


Drawing

Standard Dimensions
(mm)

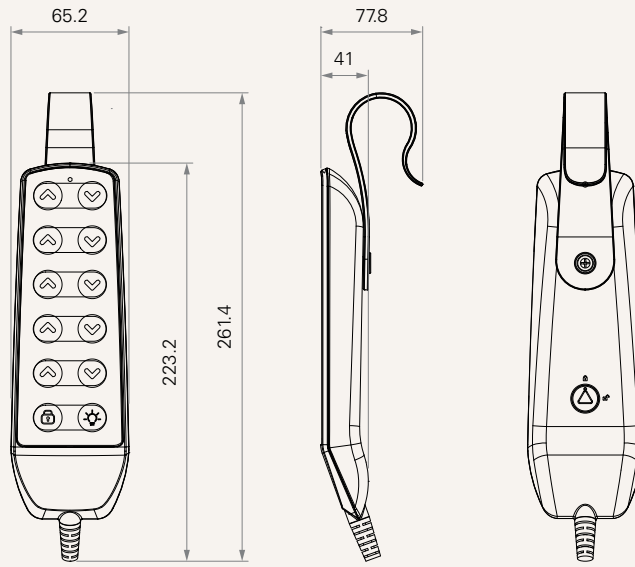

MCU	0 = Without			
Control Box Type	0 = Without MCU	1 = With MCU control box		
Communication Type	2 = Switch type (1~4 motors) 8 = Switch type (5 motors)	4 = Bi-directional Scan		
PCBA	1 = General	2 = Power saving function		
Button Definition	Note: please contact TiMOTION before making an order			
Backlight	0 = Without	1 = With		
Safety Key	0 = Without	1 = With		
Plug	4 = DIN 8P	5 = RJ 10P		
Plug Angle	1 = 90°	2 = 180°		
Cable Length See page 4	1~6 = 1~6			
Color	2 = Pantone 428C	3 = White S		
Hook See page 4	0 = Without	1 = Standard	4 = Magnetic hook	
IP Rating	1 = Without	2 = IP54	3 = IP66	4 = IP66W

Cable Length

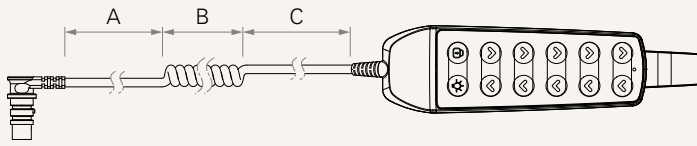


Cable Section (mm)

CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	100	600	100
6	1000	200	200

Hook

1 = Standard

4 = Magnetic hook

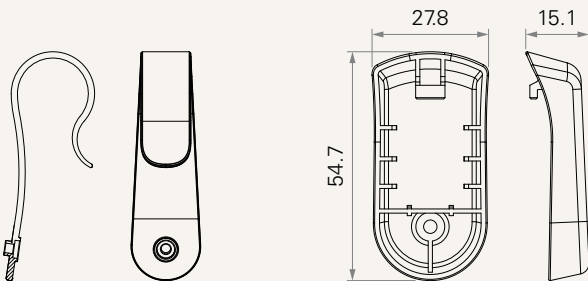

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.