

TP7M series



Product Segments

Care Motion

General Features

Transformer type Input voltage Max. output Plug support Color Options Certificate

Wall mount design


SMPS 100~240V AC 29V DC, 3.75A EU, USA, AUS, UK, JPN Black or grey Anti Pulling Clip UL, ACMA, PSE, IEC/EN 60335-2-29, IEC 60601-1, IEC 60601-1-2


TP7M series

Drawing


Standard Dimensions (mm)


Dimensions with EU Plug (mm)






Dimensions with USA Plug (mm)











TP7M series


Drawing

Standard Dimensions (mm)


Dimensions with AUS Plug (mm)







Dimensions with UK Plug (mm)

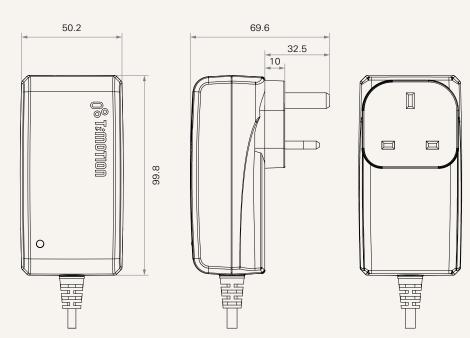







Drawing

Standard Dimensions (mm)

Dimensions with JPN Plug (mm)





0)



TP7M Ordering Key

1 T*i* MOTION

TP7M

Version: 20200603-D

Input Voltage	4 = 100~240VAC (SMPS)		
AC Plug	1 = EU	3 = AUS	5 = JPN
	2 = USA	4 = UK	
Anti Pulling Clip	1 = With		
DC Output Socket	3 = Long DIN 5P	8 = Small 01P	
DC Cable Length (mm)	2 = Straight, 2000	4 = Straight, 4000	
Color	1 = Black	2 = Pantone 428C	
IP Rating	1 = Without		

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.